



شركة البدرى للأعمال الكهربائية

إحدى شركات مجموعة البدرى للتنمية والاستثمار

BADRY ELECTRICAL WORKS Co.

ELECTRICAL CONTRACTOR

سابقة الخبرة والأعمال

فى مجال أعمال وشبكات ومرافق وتأسيس وتشطيبات الكهرباء

ELECTRICAL EXPERIENCE & REFERENCE LIST

BADRY References List No.: ELEC-EXP-275-02



BADRY ELEC

Electrical Works Dept.

6B, Sixth October St., Manshiet Al Sad Al Aaly,

Al-Salam, Cairo, Egypt.

P.O Box 1527 Alf Maskan, Cairo, Egypt.


Tel: +202 219 06 401

Fax: +202 219 06 823 - Cell: +20 100 57 43 852

E-mail: ELEC @badrygroup.com

Web : www.badrygroup.com/ ELEC

BADRY
Group



References and Experiences

BADRY Dept. Code : 275

Scope of Work (SOW) : ELECTRICAL

Dept. Manager : Hany El-Badry

References List No : ELEC-EXP-275-02

REV / Update : Rev 02

Document Issued : 2022

SOW /
TASKING
CODES

D&B (Design and Build)

S&I (Supply and Install)

U&M (Upgrade and Maintenance)

Sr. No	Project / Operation - Name	EGY PLACE Area	Project Delivery Year	Contract Price Millions EGP	Client	Consultant	TASKING Status CODE	Notes Regarding TASKING
1	Infrastructure Electric Network / Sub Works for NPP Paper October Factory	Cairo	2012	2.16	NPP Paper Industries	KEM Consult	S&I	Infrastructure Electric Network from BADRY MEP Subcontract
2	Infrastructure ELEC Network / Sub Works for Corps Collection Center	Luxor	2013	0.25	ACDI / VOCA NGO	USAID / ACDI	S&I	Infrastructure Drainage Network from BADRY CONS Subcontract
3	Infrastructure Main ELEC Network works for NCP, Nile Cornich Project	Cairo	2015	01.20	CCC (Main Contractor)	Shaker / ACE	S&I	Infrastructure Drainage Network from BADRY MEP Subcontract
4	Infrastructure Subcontract Package for Kawther Computer Institue Facility	Sohag	2016	07.68	AUPIC Projects (Main Contractor)	Prof. Dr. Eng. Hassan El-Tamaly	D&B	Infrastructure Utilites Networks from BADRY MEP Subcontract
5	Infrastructure Electric Network works for Boath Azhar Building	Cairo	2017	04.99	AL-MARASEM (Main Contractor)	DYAR Consult	U&M	Infrastructure Electric Network from BADRY MEP Subcontract
6	Infrastructure Electric Network works for Golf Hilton Pyramids Hotel	Cairo	2018	02.25	TANFEEZ (Main Contractor)	HILTON Hold.	U&M	Infrastructure Electric Network from BADRY MEP Subcontract
7	Infrastructure Subcontract Package for Paradise Complex Resort	Marsa Allam	2018	19.21	Paradise Complex	AUPIC Projects	D&B	Turnkey Project, Complex Resort Infrastructure Utilites Networks
8	Infrastructure Subcontract Package for Rotting Farms Facilites	Fayoum	2019	17.58	Rotting Farms	EDSI Eng. Dseijns	D&B	Turnkey Project, Infrastructure Utilites Networks, piping, Tie-Inns
9	Infrastructure Networks Subcontract Package for A4 Compound Loutes Resort	Ismaelia	2020	06.25	HASO-EGYPT (Main Contractor)	Loutes Touristic	U&M	Infrastructure Utilites Networks Subcontract Package

وثيقة العقد الأساسي

**عقد مقاول رقم (1) تنفيذ المرحلة الأولى للأعمال الكهربائية
لمصنع إنتاج شكاثر الأسمنت بمدينة 6 أكتوبر**

بمعون الله تعالى ، حرر هذا العقد ،،

وتم الاتفاق في مدينة القاهرة في يوم الأحد الموافق 4 / 7 / 2010 -- بين كلا من :

أولاً : الشركة الوطنية للصناعات الورقية NPP، ويمثلها السيد الأستاذ أيمن عبد الفتاح أبو العلا بصفته، ومقرها الإدارى بالشقة 1 بالدور الأرضى عمارة 207 شارع 28 بالتجمع الخامس - القاهرة الجديدة - محافظة طوان، والمشار إليه فيما بعد بالمالك أو صاحب العمل أو (الطرف الأول)، ويشمل هذا التعبير كل من يخلف صاحب لعمل ومن يحيل إليهم العقد.

ثانياً : مجموعة البدر جروب، سجل تجارى رقم 16094 القاهرة، ويمثلها السيد المهندس هانى البدرى محمد بصفته المدير التنفيذى لشركة البدرى للأعمال الكهروميكانيكية "إحدى شركات مجموعة البدر جروب"، ومقرها 6 ب شارع 6 أكتوبر - منشية السد العالى - السلام - القاهرة، والمشار إليها فيما بعد بالمقاول أو الشركة المنفذة أو (الطرف الثانى)، ويشمل هذا التعبير كل من يخلف المقاول ومن يصرح له بإحالة العقد إليه.

تمهيد

لما كان المالك "الطرف الأول" يرغب فى تنفيذ المرحلة الأولى للأعمال الكهربائية لمصنع إنتاج شكاثر الأسمنت الذى يجرى إنشاؤه بمنطقة بولاريس الصناعية - لمطور التركى - قطعة 7 - مدينة 6 أكتوبر، فقد عهد إلى الطرف الثانى، ليقدم عرضه لتنفيذ الأعمال المطلوبة، على أن يتم البدء بالمرحلة الأولى "الأعمال المسعرة بالمقاييس المرفقة"

وقد فضل المالك العرض المقدم من الطرف الثانى "المقاول" بعد التقييم الفنى والمالى للعرض المقدم، وتلقى عرضه وأهدافه مع تلك التى يأملها المالك وحسن سير وتميز سابقة أعمال المقاول المنفذة، والتزام عرضه للقيام بتنفيذ الأعمال طبقاً للشروط والمواصفات الفنية الموضوعية والرسومات التنفيذية كعقد التزام بعمل.

ولما كان عرض الطرف الثانى (المقاول) قد إقترن بقبول وموافقة الطرف الأول (المالك)،

فقد إتفقا الطرفان بصفتهما وبعد إقرارهما بكامل أهليتهما للتعاقد على مواد العقد التالية ومع إعتبار هذا التمهد وما يلحقه من مكاتبات ووثائق ومستندات وإجراءات وممارسات وأعمال منفذة جزء لا يتجزأ من العقد ومكمله.

المادة الأولى : الغرض من العقد.

إن الغرض من هذا العقد كعقد التزام يعمل هو تنفيذ المرحلة الأولى للأعمال الكهربائية لمصنع إنتاج شكاثر الأسمنت الجارى إنشاؤه، شاملة المواد والمعدات والعمالة وجميع الأشياء اللازمة للتنفيذ، وحسب وثائق العقد المكملة واللاحقة، وطبقاً لمقاييس البنود الأساسية المرفقة بعرض المقاول، على أن يوفر المالك أول بأول لمياه والكهرباء وجهازية الموقع والتراخيص والحفر والردم والإنشاءات المنبئية والمواد المطلوب فى بنودها بالمقاييس التركيب، وفى حالة الاتفاق على مهام جديدة يتم إضافتها كتابياً لوثائق العقد بموجب خطاب إستكمال أو إسناد أعمال مفصل لكميات والبنود والشروط والقيمة، أو يتم إستقلالها بعقد جديد حسب اتفاق الطرفين.

المادة الثانية: مدة العقد.

مدة تنفيذ هذا العقد هى ستون يوم عمل، وتشمل مدة التنفيذ لكميات الأعمال المطلوبة للبنود المتعاقد عليها طبقاً لمقاييس الأعمال وعرض المقاول المقدم، وتبدأ مدة التنفيذ من تاريخ تسليم الموقع إلى المقاول خالى من المعوقات وصرف الدفعة المقدمة وتوفير المواد والمهام التى على عاتق المالك وإعتماد الرسومات التنفيذية والبرنامج الزمنى أيهم لاحق، وتستثنى أيام الأجازات والأعياد الرسمية والتوقيات بأمر المالك أو السلطة المختصة أو لظروف الموقع، على أنه يجوز أن يصرح المالك للمقاول بالعمل أيام لعطلات والأجازات ويخلاف مواقيت العمل الرسمية لأجل إسراع إكمال وإنهاء التنفيذ لغرض تسريع بدء تشغيل إنتاج المصنع.

المادة الثالثة: عرض ومقاييس العقد.

المقاييس الأساسية المرفقة والمسعرة ضمن عرض المقاول من صفحة 1 : صفحة 10 ضمن 17 صفحة - علماً بأن البنود صفرية التسعير تعنى كونها خارج المرحلة الأولى أو خارج أعمال هذا العقد، كذلك فالبنود مبين بتوصيفها ما إذا كان المطلوب هو التوريد والتركيب أم التركيب فقط، وفى حالة أن البند تركيب فقط يلتزم المالك بتوريده كامل للموقع وفى موعده المحدد طبقاً للبرنامج الزمنى المعتمد وإلا يعفى المقاول من كل تأخير عنه.

المقاييس الإضافية المرفقة للبنود الإختيارية يتم تطبيقها وإدراج أعمالها بالمستخلصات فى حالة طلب المالك أو الإستشارى لتنفيذ أعمال منها وطبقاً لفئة سو وحدة كل بند منها.

يلتزم المقاول بتوريد المواد المطلوبة حسب العقد طبقاً لقوائم المصنعين والموردين المعتمدة والمرفقة بعقد المقاول.

المادة الرابعة : قيمة العقد.

القيمة الإجمالية للعقد هي 2,600,000 مليون جم، فقط إنان مليون وستمائة ألف جنيه مصري لا غير، لقاء تنفيذ كميات بنود الأعمال الأساسية لهذا العقد وفقاً لجدول الكميات وفئات الأسعار بالمقاييس المرفقة خلال مدة العقد، قيمة غير شاملة ضريبة المبيعات، على أن تستم الإضافة الدورية لمقابل التوريدات والأعمال والخدمات الجديدة أو المعدلة أو المطلوبة من البنود الإضافية أو تلك التي لم ترد بمقاييس كميات العقد ويتم بموجب نموذج طلب أعمال معتمد السعر والكمية في حالة إحاقها بالعقد، على أن تضاف مدة التنفيذ المناسبة لتلك الأعمال الإضافية أو الجديدة إن وجدت" إلى مدة وقيمة العقد بملحق مكمل أو أمر كتابي أو بإعتماد مستخلص أعمالها من المالك.

ويلتزم المقاول بتنفيذ جميع بنود العقد طبقاً لأسعار المقاييس المرفقة وبدون أى زيادة خلال فترة التعاقد، وللمالك الحق في حذف أى بنود عند عدم الحاجة إليه، كما للمالك الحق في زيادة أو إنقاص كميات بنود المقاييس.

المادة الخامسة : الدفع والسداد.

يلتزم الطرف الأول بدفع قيمة العقد مرحلياً مقابل قيام الطرف الثاني بتنفيذ وإنهاء الأعمال المتعاقد عليها طبقاً للعقد، ويتم المحاسبة طبقاً للمكميات المنفذة فعلياً بعد حصرها وبموجب مستخلصات أعمال أو مطالبات مالية يقوم المقاول بتقديمها كل عشرة أيام، ويتم صرف المستخلص خلال أسبوع من تاريخ تقديمه ، ومراحل السداد كالتالي:-

- 1- دفعة مقدمة أولى بقيمة 10% من قيمة إجمالى العقد مع التعاقد وتسليم الموقع مقابل شيك ضمان بنكى من المقاول
- 2- دفعة تشويينات 1 بقيمة 40% من إجمالى قيمة البنود الموردة الأولى للموقع - خلال العشرة أيام الأولى "مستخلص 1"
- 3- دفعة أعمال 1 بقيمة 20% من إجمالى قيمة البنود المنفذة بنسبة تنفيذ 70% - خلال العشرة أيام الثانية "مستخلص 2"
- 4- دفعة أعمال 2 بقيمة 20% من إجمالى قيمة البنود المنفذة بنسبة تنفيذ 90% - خلال العشرة أيام الثالثة "مستخلص 3"
- 5- دفعة تشويينات 2 بقيمة 40% من إجمالى قيمة البنود الموردة الثانية للموقع - خلال العشرة أيام الرابعة "مستخلص 4"
- 6- دفعة أعمال 1 بقيمة 20% من إجمالى قيمة البنود المنفذة بنسبة تنفيذ 70% - خلال العشرة أيام الخامسة "مستخلص 5"
- 7- دفعة أعمال 2 بقيمة 20% من إجمالى قيمة البنود المنفذة بنسبة تنفيذ 90% - خلال العشرة أيام السادسة "مستخلص 6"
- 8- مستخلص ختامى للأعمال مع التسليم الإبتدائى للأعمال ونصفيه حساب المقاول - والصرف لنسبة 90% من إجمالى الأعمال المنفذة "ختامى"
- 9- دفعة نهائية أخيرة ورد شيك الضمان للمقاول بعد 3 شهور من تاريخ الإستلام - والصرف لنسبة 10% من إجمالى الأعمال المنفذة "رد ضمان"

المادة السادسة : غرامة التأخير.

تطبق غرامة تأخير على المقاول وخصما من حسابه بنسبة 5% من إجمالى قيمة البنود المتأخر فى تنفيذها أو المتعطلة إجماليا من عقده ولو تأخر فى جزء منها، وذلك عن كل شهر كامل تأخير للأعمال الكلية أو الجزئية والتي يكون المقابل هو السبب الوحيد لتأخرها.

المادة السابعة : تسوية الخلافات.

كل خلاف أو نزاع ينشأ عن تطبيق هذا العقد - لا قدر الله - ولا يتم التوصل إلى تسويته بين الطرفين وديا ، يتم اللجوء إلى التحكيم التجارى أو المحكمة التجارية أو الإقتصادية المختصة، ويكون حكم المحكمة أو قرار لجنة التحكيم فى ذلك نهائيا وملزما للطرفين.


وتوثيقاً لما تقدم فقد قاما الطرفان بالتوقيع على هذه الوثيقة فى المكان والتاريخ المذكورين أعلاه.

والله الموفق،،،،

الطرف الأول

المالك / صاحب العمل
الشركة الوطنية للصناعات الورقية
National Paper Products NPP
أ / أيمن عبد الفتاح أبو العلا

الاسم : السيد أيمن عبد الفتاح أبو العلا
الصفة :

الطرف الثاني

المقاول / الشركة المنفذة
مجموعة البدر جروب
شركة البدرى للأعمال الكهروميكانيكية
م / هانى البدرى محمد

الاسم : هانى البدرى محمد
الصفة : مدير تنفيذ الأعمال
التوقيع :
ختم الشركة:



BADRY
MEP**شركة البدرى للأعمال الكهربائية**
إحدى شركات مجموعة البدرى للنسبة والاستثمار**BADRY Electro-Mechanical & Works Co**

القاهرة في 2011 / 5 / 8

كشف حساب مجمع - إجمالي الأعمال الكهربائيةالسادة / الشركة الوطنية للصناعات الورقية NPP
عناية السيد المحاسب / أيمن أبو العلا - عضو مجلس الإدارةتحية طيبة وبعد ،،،
بالإشارة إلى أعمال تنفيذ شبكة كهرباء مصنع شكانر الأسمنت والتي تم تسليمها - بمدينة 6 أكتوبر، مرفق لميكنكم كشف تصحيح بجلى بقيمة الأعمال الكهربائية المنفذة حتى مستخلص 10 الصادر بتاريخ 13 / 4 / 2011 - بإجمالى قيمة 4,161,492 فقط لربعة مليون معة ولحد ومتون ألفا وريصقة إثنان وتسعون جنية مصرى - قيمة غير شاملة ضريبة المبيعات - وقد تم تسويتها فى تاريخه

رقم الشيك	تاريخ الشيك	ملاحظات	مجموع جم - LE	قيمة منصرفه جم بنك الصرف		القيمة جم - LE	بيان / مستند - المطالبة المالية	
				AWB	ALEX		In Advance	الدفعة المقدمة
600818905	4/7/2010	شيك رقم 1	260,000	0	260,000	0	In Advance	الدفعة المقدمة
600818879	25/7/2010	شيك رقم 1	250,000	0	250,000	474,475	Invoice 1	مستخلص 1
600818887	3/8/2010	شيك رقم 1	224,475	0	224,475			
600984841	17/8/2010	شيك رقم 2	131,400	0	131,400	131,400	Invoice 2	مستخلص 2
600984842	17/8/2010	شيك رقم 3	130,000	0	130,000	130,000	Invoice 3	مستخلص 3
600984859	30/8/2010	شيك رقم 4	240,960	0	240,960	240,960	Invoice 4	مستخلص 4
600984867	9/9/2010	شيك رقم 5	138,000	0	138,000	138,000	Invoice 5	مستخلص 5
600984866	9/9/2010	شيك رقم 6	394,017	0	394,017	394,017	Invoice 6	مستخلص 6
600984881	6/10/2010	تم خصم دفعة الدفعة رقم 7	433,512	0	433,512	693,512	Invoice 7	مستخلص 7
4100024056	13/12/2010	دفعة صرف مستخلص 18	250,000	250,000	0	919,710	Invoice 8	مستخلص 8
601083615	29/12/2010	دفعة صرف مستخلص 18	200,000	0	200,000			
601083625	3/1/2011	دفعة صرف مستخلص 18	356,657	0	356,657			
601083650	25/1/2011	دفعة صرف مستخلص 18	30,000	0	30,000			
301230028	28/2/2011	دفعة صرف مستخلص 18	170,000	0	170,000			
4100046241	22/3/2011	باقى دفعة 8 هـ ترحل إلى 9 أ	0	0	0			
301230046	12/4/2011	دفعة صرف مستخلص 19 ب	150,000	150,000	0	886,947	Invoice 9	مستخلص 9
301230133	30/4/2011	دفعة صرف مستخلص 19 ج	100,000	0	100,000			
301230134	30/4/2011	دفعة صرف مستخلص 19 د	302,471	0	302,471			
301230134	30/5/2011	دفعة صرف مستخلص 19 هـ	200,000	0	200,000			
301230135	30/6/2011	دفعة صرف مستخلص 19 و	200,000	0	200,000			
0	10	باقى دفعة 9 و ترحل إلى دفعة 10	0	0	0	152,471	Invoice 10	مستخلص 10
4,161,492		الأعمال حتى 13/4/2011 وتبقى الأعمال الإضافية لاحقها	4,161,492	400,000	3,761,492	4,161,492		إجمالى قيمة الأعمال حتى مستخلص "02 A.W Inv. A, Ver" 10

- 1- الأعمال عالية بالجم غير شاملة ضريبة المبيعات تم تسليمها فنيا كما تمت المحاسبة
- 2- الأعمال الجديدة اللاحقة والجارى تنفيذها سيتم تقديم مستخلص أعمال إضافية بها
- 3- مرفق لميادتم طيه صورة معتمدة من البطاقة الضريبية 34727 - تسليم ضريبة المبيعات 500 - 371 - 279

وهذا كشف حساب وشهادة منا بذلك،
وتفضلوا بقبول فائقمدير المشروعات
م / هانى البدرى

6B, 60 October st, Menshiat El-Sad ElAley - El Salam, Cairo, Egypt.

Tel.: (+202) 22958530 - 22955487 Fax: (+202) 22995860

6 شارع أكتوبر منشية السد الصالحى السلام - القاهرة.

تليفون: ٢٢٩٥٨٥٣٠ - ٢٢٩٥٥٤٨٧ (+٢٠٢) فاكس: ٢٢٩٩٥٨٦٠ (+٢٠٢)



THIS SUBCONTRACT AGREEMENT is made the ninth day of May 2011

BETWEEN Arabtec Egypt for Construction S.A.E. at P.O. Box 595, Main Heliopolis, Cairo, Arab Republic of Egypt (hereinafter called "the Contractor") of the one part and Badry at PO Box 1527, Alf Maskan, Cairo, Arab Republic of Egypt (hereinafter called "the Subcontractor") of the other part

WHEREAS

- A The Contractor is desirous that certain Subcontract Works should be carried out, viz the Supply, Installation, Testing, Commissioning, Maintenance and Warranty of the MEP Works, excluding the supply of Sanitary Ware, Mixers and Lighting Fixtures and has accepted a Subcontract Tender by the Subcontractor for the carrying out and completion of such Subcontract Works.
- B The Subcontract Works are to be carried out as part of the Main Works being carried out by the Contractor and Emaar Misr for Development. The Main Works being known as Package No. BP#17(A-1) - Construction and Finishes for Villas and Town Houses in Village L in a project known as Al Marassi in Sidi Abdul Rahman in North Coast of the Arab Republic of Egypt.

NOW THIS SUBCONTRACT AGREEMENT WITNESSETH as follows:

1. Definitions

In this Subcontract Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Subcontract hereinafter referred to.

2. The Subcontract

The following documents shall be deemed to form and be read and construed as part of the Subcontract, viz:

This Subcontract Agreement;

The Contractors Letter of Award ref: ATCE/MARASSI/LOI/2005 dated 14th March 20

The Scope of Work and Conditions of Particular Application;

The Drawings and Specifications;

The Subcontract Bills of Quantities;

The Conditions of Contract

The Main Contract Programme for the Subcontract Works

Page 1 of 2



Egypt P.O. Box : 595, Main Heliopolis, Cairo, A.R.E.
Zip Code : 11757
Tel : (+202) 2 415 9266
Fax : (+202) 2 415 9267
Email : info@arabtecuae.com
Website : www.arabtecuae.com

مصر ص.ب
رمز بريدي : 11757
تليفون : (+202) 2 415 9266
فاكس : (+202) 2 415 9267
بريد الكتروني : info@arabtecuae.com
موقع الكتروني : www.arabtecuae.com

3. Subcontractor's Principal Obligations

In consideration of the payments to be made by the Contractor to the Subcontractor as hereinafter mentioned the Subcontractor hereby agrees with the Contractor to carry out and complete the Subcontract Works and to remedy defects therein in conformity in all respects with the terms, conditions and provisions of the Subcontract.

4. Contractor's Principal Obligations

The Contractor hereby agrees to pay the Subcontractor, in consideration of the carrying out and completion of the Subcontract Works and the remedying of defects therein, at the times and in the manner prescribed by the Subcontract:

The Lump Sum of EGP 31,000,000 (EGP Thirty One Million Pounds Only).


(Which sum is hereinafter called "the Subcontract Sum") or such other sum as may become payable under the Subcontract.

5. Subcontractor's Time for Completion

The Subcontractor shall complete the whole of the Subcontract Works within the Subcontractor's Time for Completion stated in the Letter of Award.

IN WITNESS whereof the parties hereto have caused this Subcontract Agreement to be executed the day and year first above written.

SIGNED BY

 14.05.2011

for and on behalf of Arabtec Egypt for Construction S.A.E.

Name

Omar Lababidi


in the presence of

 2011 14 5

Name

Stamp

SIGNED BY

 for and on behalf of Badry

Name

Hany El-Badry

in the presence of

Name

Stamp



Page 2 of 2



أرابتك إيجيبت للإنشاءات ش.م.م.
Arabtec Egypt for Construction S.A.E.

Date: 14th March 2011
Ref: ATCE.MARASSI/LOV/2005

LETTER OF
AWARD

M/s. BADRY,
PO Box 1527,
Alf Maskan,
Cairo,
Egypt



Attention: MR. HANY EL-BADRY - BADRY GROUP, DEPARTMENT HEAD

Dear Sirs,

Project: Marassi Project - Construction and Finishes of Villas and Town Homes in Village L

Subject: Letter of Award (LOA) - Complete MEP Works - Supply, Installation, Test Commissioning, Material & Shop Drawing Submission and Approval and Coordination

We confirm our acceptance of Badry's offer dated the 13th March 2011 on a Lump Sum basis for the Supply, Installation, Testing, Commissioning, Material & Shop Drawing Submission and Approval, Complete Coordination for the MEP Works excluding the supply of Sanitary Ware, Mixers and Electrical Lighting Fixtures only, which will be supplied by Arabtec Egypt for Construction and Installed by Badry who will also provide all necessary connections and accessories for these items for the above-mentioned Project, all in accordance with the Contract Documents including, but not limited to, the Contract Specifications, Contract Drawings, Bills of Quantities, Program of Works, Tender Documents including addenda subject to the Terms & Conditions shown below and the approval of Employer/Engineer.


Terms and Conditions

1. SCOPE OF WORK:

Supply, Installation, Testing, Commissioning, Material & Shop Drawing Submission and Approval, Complete Coordination for the MEP Works excluding the supply of Sanitary Ware, Mixers and Electrical Lighting Fixtures only, which will be supplied by Arabtec Egypt for Construction and Installed by Badry who will also provide all fittings and accessories for these items in accordance with the Main Contract Specifications Division 15 and 16. Section 15050 Basic Mechanical Materials and Methods, Section 15069 UPVC Pipe and Fittings for Drainage, Section 15070 Polypropylene Pipes and Fittings, Section 15100 Valves, Section 15145 Hangers and Supports, Section 15400 Plumbing Works, Section 15430 Plumbing

Page 1 of 8



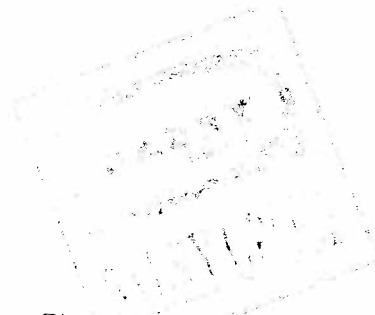

Specialties, Section 15440 Plumbing Fixtures and Section 15458 Electrical Water Heaters. Sections 15501 General Provisions for HVAC, Section 15549 Thermal Insulation, Section 15738 Room Air Conditioner, Section 15792 Acoustic Treatment, Section 15860 Exhaust and Ventilating Fans, Section 15880 Sheet Metal Ductwork, Section 15932 Air Distribution Equipment, Section 15995 Painting, 16050 Basic Electrical Materials and Methods, Section 16060 Grounding and Bonding, Section 16120 Wires and Cables, Section 16130 Raceway Boxes and Cabinets Section 16140 Wiring Devices and Disconnectors, Section 16150 Electrical Identification, Section 16425 Low Voltage Switchboards, Section 16500 Lighting Section 16750 Structure Data Network and Section 16781 Intercom System dated November 2009 and the 'For Construction' Drawings forming Attachments 'A' & 'B' to this Letter Award, including but not limited to:

- i. Site survey prior to installation.
- ii. Arabtec will supply the Sanitary Ware, Sanitary Mixers and Electrical Light Fixtures only. Badry will provide all the required connections to these that include bottle traps, drains, water supply pipes, gate valves etc to complete the system.
- iii. All materials and workmanship shall be in accordance with Specifications forming Attachment 'A'.
- iv. Tests that are required shall be carried out in accordance with the Main Contract Specification.
- v. You shall carry out the Subcontract Works in accordance with the approved Method Statement and shall accommodate any subsequent revisions as may be required.
- vi. Attend all inspections of the installed work and carry out any rectification work required for approval.

2. SUB-CONTRACT PRICE

The Accepted Subcontract Price shall be the lump sum amount of L.E. 31,000,000 (Egyptian Thirty One Million Pounds Only), being the accepted price for the execution and completion of the works and remedying any defects thereafter.

The quantities set out in the attached BOQ are for the purpose of indication only and are not to be taken as the actual and correct quantities of the works to be executed. It shall be the responsibility of the Subcontractor to calculate and verify all quantities of work to be executed in accordance to the Subcontract Documents.

The Accepted Subcontract Price shall be a fixed price Lump Sum in accordance to the Subcontract Documents.



SUBCONTRACT INTERIM PAYMENT CERTIFICATE

Project: Marassi NorthCost
No. 2011/002

Subcontractor:	BADRY GROUP	Agreement Ref.	ATCE/MARASSI/LOI/2005
Subcontract Cert. No.	Final	Month of	Jan 2013
Main Contract Cert. No.	N/A	Date of Certificate Issue:	15-Jan-13
Description of Work:	MEP Works	Invoice Number:	Final
Subcontract Type (Rem / LS):	Lump sum	Invoice Issued Date:	N/A
Subcontract Amount:	EGP 7,361,483.14	Invoice Received Date:	N/A
Agreed / Certified Variation Work:	EGP -	Cost Code:	029041
Total:	EGP 7,361,483.14		

PAYMENT DETAILS		Cumulative Current	Cumulative Previous	Current Month
A.	WORK DONE			
	A1. Value of Measured Works Completed: EGP	7,361,483.14	6,345,094.45	1,016,388.69
	A2. Value of Authorized Variation:	0.00	0.00	0.00
	A3. Material on Site: EGP 6,700,000.00 100%	6,700,000.00	6,824,682.56	-124,682.56
	A4. Other(s):	0.00	-469,012.89	469,012.89
	TOTAL VALUE OF WORK DONE	14,061,483.14	13,169,777.01	891,706.13
B.	LESS RETENTION 10% =10% (A1+A2+A3)	0.00	1,316,977.70	-1,316,977.70
	SUBTOTAL (A-B)	14,061,483.14	11,852,799.31	2,208,683.83
C.	ADVANCE PAYMENT			
	C1. Advance Payment : No Advance Payment	0.00	0.00	0.00
	C2. Recovery of Advance Payment :	0.00	0.00	0.00
	REMAINING ADVANCE PAYMENT (C1-C2)	0.00	0:00	0.00
D.	DEDUCTION (General Taxes) 0.50%	-70,307.42	-65,848.89	-4,458.53
	GROSS AMOUNT DUE FOR PAYMENT (A-B+C+D+E)	13,991,175.72	10,975,523.33	3,015,652.39
Actual Progress (%): 191.01%		Subcontract Particulars		
Currency of Payment: EGYPTION POUNDS		Payment Terms: the payment shall paid to		
Place of Payment: EGYPT		the subcontractor As Final Agreement Dated		
Date Payment to be made on: As Final Agreement installments		date		
Sub-contract signed on: 14-Mar-11		Payment Method: Cheque/Transfer		
P-Bond Value: Not Applicable Valid up to:		Material on Site: 6,700,000.00 EGP		
A/P-Bond Value: Not Applicable Valid up to:				
Insurance:				

Prepared by

Cost Control





Checked by

Quantity Surveyor:

Cost Controller:

Senior Quantity Surveyor:

Construction Manager:

Reviewed and Approved by				Note:
Project Commercial Manager	Project Manager	Business Unit Head	Commercial Director	
				
Date	Date	Date	Date	

CC: Site, QS

SUBCONTRACT INTERIM PAYMENT CERTIFICATE

Project: Marassi North Cost
No. 2011/002

Subcontractor:	BADRY GROUP	Agreement Reference:	ATCE/MARASSI/LOI/2005
Subcontract Cert. No.	10(Ten)	Month of:	February 2012
Main Contract Cert. No.	N/A	Date of Certificate Issue:	25-Feb-12
Description of Work:	MEP Works	Invoice Number:	10(Ten)
Subcontract Type (Rem / LS):	Lump sum	Invoice Issued Date:	25-Feb-12
Subcontract Amount:	EGP 31,000,000.00	Invoice Received Date:	25-Feb-2012
Agreed / Certified Variation Work:	EGP -	Cost Code:	029041
Total:	EGP 31,000,000.00		

PAYMENT DETAILS				Cumulative Current	Cumulative Previous	Current Month
A.	WORK DONE					
	A1. Value of Measured Works Completed:	EGP	8,539,113.50	8,539,113.50	8,142,188.78	396,924.72
	A2. Value of Authorized Variation:			0.00	0.00	0.00
	A3. Material on Site:	EGP	9,986,471.23 70%	6,990,529.86	6,511,625.09	478,904.77
	A4. Other(s):			-692,103.72	-640,794.46	51,309.27
	TOTAL VALUE OF WORK DONE			15,529,643.36	14,653,813.87	875,829.49
B.	LESS RETENTION	10%	=10% (A1+A2+A3)	1,552,964.34	1,465,381.39	87,582.95
	SUBTOTAL (A-B)			13,976,679.03	13,188,432.48	788,246.54
C.	ADVANCE PAYMENT					
	C1. Advance Payment : No Advance Payment			0.00	0.00	0.00
	C2. Recovery of Advance Payment :			0.00	0.00	0.00
	REMAINING ADVANCE PAYMENT (C1-C2)			0.00	0.00	0.00
D.	DEDUCTION (Social Insurance)	2.60%		-403,770.73	-380,999.16	-22,771.57
E.	DEDUCTION (General Taxes)	0.50%		-77,648.22	-73,269.07	4,379.15
	GROSS AMOUNT DUE FOR PAYMENT (A-B+C+D+E)			12,803,156.36	12,093,369.80	709,786.56
Actual Progress (%):	50.10%			Subcontract Particulars		
Currency of Payment:	EGYPTIAN POUNDS			Payment Terms: the payment shall p to		
Place of Payment:	EGYPT			the subcontractor 67 days after Invoice		
Date Payment to be made on:	2-May-12			date		
Sub-contract signed on:	14-Mar-11			Payment Method: Cheque/Transfer		
P-Bond Value:	Not Applicable	Valid up to:		Material on Site: 6,990,529.86 EGP		
A/P-Bond Value:	Not Applicable	Valid up to:				
Insurance:						

Prepared by

Cost Control

Checked by

Senior Quantity Surveyor:

Quantity Surveyor:

Cost Controller:

Construction Manager:

Reviewed and Approved by				Note:
Project Commercial Manager	Project Manager	Business Unit Head	Commercial Director	
Date	Date	Date	Date	

CC: Site, QS



شركة هاسو للمقاولات والتنمية
HASO - EGYPT

القاهرة فى : ٣٠ / ١٢ / ٢٠١٠ م

شهادة خبرة - سابقة أعمال

إلى من يهمه الأمر

تحية طيبة وبعد ،،،

تشهد شركة هاسو للمقاولات والتنمية HASO-EGYPT أن مجموعة البدرى للتنمية والاستثمار ومن خلال إحدى شركاتها المتخصصة (شركة البدرى للأعمال الكهروميكانيكية BADRY MEP) قد قامت بتنفيذ أعمال شبكة الكهرباء وإنذار الحريق ونظامى الأرضى والصواعق للمبنى الإدارى لشركة المقاولات المصرية بالمهندسين - مقولة باطن الشركة لحساب المقاول العام شركة المقاولات المصرية (مختار إبراهيم) بمشروع تطوير المقر الإدارى.

وقد بلغت جملة الأعمال المنفذة ٣,٣٠٢,٦٠١ جم فقط ثلاثة ملايين وثلاثمائة وإثنين ألفا وستمائة وواحد جنيها مصريا للأعمال التى تم إستلامها نهائيا فى ٢٩/١٢/٢٠١٠.

وقد تم تنفيذ الأعمال وتسليمها بصورة جيدة ومرضية.

أعطيت هذه الشهادة بناء على طلب شركة مجموعة البدرى الشركة المنفذة دون مسئولية على شركتنا.

وهذه شهادة منا بذلك ،،،


وتفضلوا بقبول فائق الاحترام ،،،

مدير المشروعات

محمد خليل

م/ محمد خليل



Company: H A CONSTRUCTION "HAC" Address: Yehia Zakaria St., Industrial Zone, District #5 Lot 5, Sheraton Heliopolis Housing, Cairo, Egypt Telephone: +20-2-26785917 Fax: +20-2-26785920		PAGE 1 OF 7 P.O. No.: 490002573 Date: 9-May-23 All correspondences and invoices in connection with this ORDER will bear the above P.O. NO.
---	--	--

PURCHASE ORDER		Project Name/No.: DNPP / Construction and assembly Base
Currency: Euro		Discipline: Civil & Finishing <input type="checkbox"/> Mechanical <input checked="" type="checkbox"/> Electrical <input type="checkbox"/>

SUPPLIER DETAILS "Second Party": Name: EX-Machinery Explosion proof Equipment B.V. Address: Tinststraat 332984 AN Ridderkerk, Netherlands Tele : +31 (0)180 472880 Fax : Attention: Liesbeth van Tienhoven E-mail: <a href="mailto:Liesbeth.van.Tienhoven<lt@ex-machinery.nl>">Liesbeth van Tienhoven <lt@ex-machinery.nl> Mobile +31 6 12538798	NOTIFY : Badry Group is the main contractor, Ex-Machinery is the Manufacturer & Supplier Name : Badry Group Address : 1527 Alf maskan , CAIRO Attention : Hany El-Badry Email : badry@badrygroup.com	Equipment / Material: Description: split-explosion proof Brand: As Approved submittal Origin: As Approved submittal Temporary <input type="checkbox"/> Permanent <input checked="" type="checkbox"/> Consumables <input type="checkbox"/> Inspection: Required <input checked="" type="checkbox"/> Not Required <input type="checkbox"/>
---	---	---

DO NOT DUPLICATE
 SUPPLIER TO SIGN AND RETURN THE ORDER ACKNOWLEDGEMENT TO H A CONSTRUCTION "HAC" COMPANY WITHIN (2) DAYS.
 Consultant approval and comments to be considered as part of this purchase order.
 This order is subject to commercial and technical submittals approvals. In case the technical submittal and/or commercial offer rejected by the consultant or the owner, this PO will be considered null.

Total Order Amount	EUR 228,000 two hundred twenty-eight thousand EUR
---------------------------	---

FOR SUPPLIER USE ONLY	H A CONSTRUCTION "HAC".
SUPPLIER ACKNOWLEDGEMENT WE HEREBY CONFIRM ACCEPTANCE OF THIS PURCHASE ORDER IN FULL WITHOUT EXCEPTIONS INCLUDING ALL REFERENCED ATTACHMENTS HERETO <i>6.A. van Tienhoven, managing director</i> NAME: _____ SIGNATURE: <i>[Signature]</i> DATE: <i>9-5-2023</i>	Prepared: Abd Elrahman Ahmed Checked: Mohamed Magdy Reviewed: Ahmed Abdelaal APPROVAL SIGNATURE: _____

- APPENDICES:**
- A- ORDERED BILL OF QUANTITY
 - B- PURCHASE ORDER CONDITIONS.
 - C- CONSULTANT APPROVED SUBMITTAL.
 - D- PROJECT SPECIFICATIONS & DRAWINGS.
 - E- MATERIAL LIST.
 - F- CONSULTANT COMMENTS TO BE CONSIDERED.
 - G- MATERIAL DELIVERY SCHEDULE FOR EACH ITEM.

Ex-Machinery
Explosion Proof Equipment B.V.
Tinststraat 33, 2984 AN Ridderkerk
The Netherlands
www.ex-machinery.com





Consolidated Contractors Group S.A.L (Offshore)

BADRY Group for Development & Investment
P.O.Box 1527 Alf Maskan
Cairo-Egypt

Ref.: 1018-NCP-BADR-L-11244
Date: August 27th 2015
Response required: No

Attention: Eng. Hany El-Badry-Operations Manager

**Subject: The Nile Corniche Project, Cairo-Egypt
S/C Agreement No.1018-NCP-SUB-SA-0154 –Supply and Install of the
Project's Main Drainage System Works for the NCP
Signed and Stamped copy of Subcontract Agreement.**


Dear Sir,

Kindly find enclosed herein one original signed and stamped copy of the subject Subcontract Agreement of the Supply and Install of the Project's Main Drainage System Works for the Nile Corniche Project.

The Subcontractor is reminded of his obligation to submit all the necessary deliverables in accordance with the Subcontract Agreement provisions and due dates specified therein.

We look forward to continue working with the Subcontractor on such a renowned project through a partnership that will enhance the value of development for our Employer.

Yours faithfully,

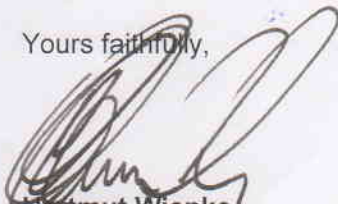

Hartmut Wienke
Sr. Project Director

Encl: Signed and Stamped Subcontract Agreement No.1018-NCP-SUB-SA-0154

26. يترد الطرف الثاني بتعليمات الادارية وشئون الافراد الخاصة بالشركة وكذلك بمواعيد العمل الخاصة بالمشروع علي ان يسمح تصرف الثاني بالعمل ليلا .

البند الثالث الاسعار:

1. يدفع الطرف الاول للطرف الثاني لتنفيذ هذا العقد كاملا مبلغ بأجمالي وقررة 1,200,000.00 (مليون ومائتي الف جنيها مصريا لا غير) علي أساس جدول الاسعار المرفق, قليلة للزيده او النقصان طبقا والاعمال الفعلية النهائية لتنفيذ هذا العقد .
2. من المتفق عليه ان الفئات والاسعار المرفقة نهائية ولا يحق للطرف الثاني المطالبة بتعديلها لاي سبب من الاسباب ويتم احتساب قيمة الأعمال بعد تنفيذها بناء علي ما يتم حصره هندسيا بمعرفة الطرف الأول.
3. الأسعار المتفق عليها تشمل كافة الضرائب والرسوم طبقا لقوانين جمهورية مصر العربية.
4. يحق للطرف الأول تحديد أي كمية اضافية من الأعمال بنفس شروط هذا العقد بحيث لا تزيد عن 25% من القيمة الاجمالية للعقد.

البند الرابع – المحاسبة والصرف:

1. يدفع الطرف الاول الي الطرف الثاني 15% من قيمة التعاقد كدفعة مقدمة مقابل خطاب ضمان بنكي يعتمد من الطرف الاول يتم رده فور استرجاع قيمة هذه الدفعة.
2. يدفع الطرف الاول بموجب دفعات دورية نصف شهرية الي الطرف الثاني 80% من قيمة التعاقد للبند بعد تسليمها والموافقة عليها من الطرف الاول بموجب .
3. يدفع الطرف الاول الي الطرف الثاني 10% من قيمة العقد بعد التسليم الابتدائي للطرف الاول والجهات المختصة.
4. يستقطع الطرف الاول من الطرف الثاني 5% من قيمة العقد كأمين أعمال تسترد بعد ثلاثة أشهر من تاريخ التسليم الابتدائي للطرف الاول.
5. يدفع الطرف الاول الي الطرف الثاني 5% من قيمة العقد بعد سنة من التسليم الابتدائي للطرف الاول.

البند الخامس - مدة العقد

يتعهد الطرف الثاني بتنفيذ جميع الاعمال علي مرحلتين خلال مدة اجمالية للمرحلتين لا تتجاوز ثلاثة أشهر وتبدأ المرحلة الاولى من تاريخ استلام الموقع خالي من العوائق كما هو مفصل بالبرنامج الزمني التنفيذي لهذا العقد والمقدم من الطرف الاول للمشروع والذي يعتبر مكملا لهذا العقد وجزء لا يتجزأ منه.

البند السادس – إنهاء التعاقد


يحق للطرف الأول إنهاء العقد في أي وقت بعد إنذار الطرف الثاني وذلك في حالة أخلل الطرف الثاني بأي من بنود العقد أو عدم التزامه بأي من المواصفات أو لوحات المشروع أو عدم التزام الطرف الثاني بالمدة المخصصة لإنهاء الأعمال والمنصوص عليها في العقد .

البند السابع – نسخ العقد ومرفقاته:

وقد تحرر هذا العقد ومرفقاته من نسختين بيد كل طرف نسخة للعمل بها.

البند الثامن - المرفقات:

1. جدول الاسعار والكميات

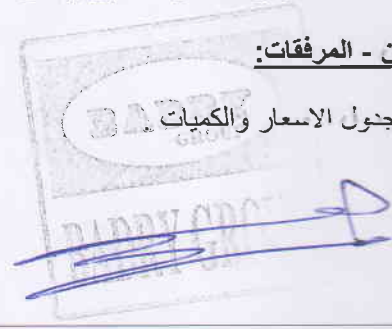

2. عرض الاسعار النهائي المقدم من شركة البدري للاعمال الكهروميكانيكية
3. البرنامج الزمني التنفيذي للطرف الاول
4. مخطط توضيحي عام للمشروع

التوقيعات

الطرف الثاني

شركة البدري للاعمال الكهروميكانيكية

الأسم : هاني البدري
الوظيفة : مدير عام
التوقيع : [Signature]



الطرف الأول

مجموعة اتحاد المقاولين ش.م.ل

الأسم : هاني البدري
الوظيفة : مدير
التوقيع : [Signature]



BADRY
MEP

شركة البدرى للأعمال الكهروميكانيكية
إحدى شركات مجموعة البدرى للتنمية والاستثمار

BADRY Electro-Mechanical Works Co.

MEP CONTRACTOR

THE NILE CORNICHE PROJECT


External Sewage Line Works

CONSOLIDATED CONTRACTORS GROUP S.A.L. (CCC)

Quotation # 22109-010-2129, Rev 00 -Aug. 2015



P. O. Box 1527 Alf Maskan, Cairo, Egypt.
Tel: +202 229 58530, +202 229 55487
Fax: +202 229 95860 - Cell: +20 0100 574 3852
E-mail: mep@badrygroup.com
Web: www.badrygroup.com



BADRY
Group

Handwritten signature



Consolidated Contractors Group
THE NILE CORNICHE PROJECT, CAIRO - EGYPT
Bill of Quantities for the external sewage line



مجموعه اتحاد المقاولون
مشروع كورنيش النيل بالقاهرة
جدول الاسعار و الكميات لخطوط الصرف الخارجيه

Sr. #	DESCRIPTION	Quant	Unit	Unit rate	Total (LE)	الرقم
		الكمية	الوحده	سعر الوحدة بالجنيه	الإجمالي بالجنيه	
1-	SEWAGE PIPE LINE AT DEAPTH FROM ZERO TILL 3.5 METER with length meter: Supply, excavation and install UPVC pipes in diameters of 110,160,200,250mm and excavation, install of 300mm pipes and all are 10 bar pipes ,this with the connection to the manholes along with closing and grouting around pipes and extend the pipes from manholes 2 meters inside the building and finish the work completely as per the drawings and industry assets all pipes are from Local market and from the approved manufacturers listed by the Great Cairo sewage company. The item price includes: The item price includes: supply and install Tess, elbows and sockets Breaking the asphalt with any thickness Excavation in any soil type "rocky, stony, concert... etc." Removal of the surface water and the underground water with authority coordination Supply and backfill under, around and above pipes with clean sand free of strange Particles till the asphaltting start level and with compaction-watering as per the specifications and the instructions of the supervisor engineer Supporting the trench sides as per supervising engineer and as per the drawings along with providing the excavation warning signs and following the professional health and safety regulations in all the work phases Apply the pressure testing Removal of excavation products to the public waste dumps. Making any other works were not stated above and are close related to the installation and testing as per the technical specifications and According to the assets of the Industry					-1
						خطوط الصرف على اعصاب من صفر حتى ٣.٥ متر بالمتر الطولي: توريد و حفر وتركيب مواسير UPVC اقطان ١١٠ و ١٦٠ و ٢٠٠ و ٢٥٠ مم و تركيب وحفر مواسير قطر ٣٠٠ مم و الجميع ضغط ١٠ بار مع التوصيل على المطابق و الثقيل و التحشيش و نهو العمل كاملا مما جميعه و حسب الرسومات المرفقه مع مد المواسير من المطابق الي داخل المعني لمسافه ٢ متر و حسب اصول الصناعه على ان تكون المواسير من السوق المحلي و من المصنوعون المعتمدون لدي مرفق الصرف بالقاهره الكبرى و سعر البند يشمل :- توريد و تركيب كعبان و مشتركات و حطب تكسير طبقات الاسفلت باي سمك الحفر في جميع انواع التربه "صخره او زلطيه او خرسانيه الخ" نزع المياه السطحيه او الجوفيه و التنسيق مع الحي اصرف نتاج النزع الجوفي التوريد و الردم اسفل و حول و فوق المواسير بالرمال النظيفه الخاليه من الشوائب حتى منسوب الاسفلت مع التمسك و الرش بالمياه طبقا للمواصفات و تعليمات مهندس الاشراف سند جوانب الحفر حسب تعليمات مهندس الاشراف و الرسومات المرفقه مع وضع اشارات التحذير من الحفر و اتباع تعليمات الصحه و السلامة المهنيه في جميع مراحل العمل صل اختبار للخطوط إزاله نتاج الحفر و نقله للمقلب العموميه اي أعمال اخرى لم تذكر عاليه وتقع في نطاق التركيب و الاختيار طبقا للمواصفات وأصول الصناعه
1.1	UPVC Pipe 10 BAR Daim. 110mm	35	LM	1,000.00	35,000	مواسير UPVC ضغط ١٠ بار قطر ١١٠ مم
1.2	UPVC Pipe 10 BAR Daim. 160mm	10	LM	1,300.00	13,000	مواسير UPVC ضغط ١٠ بار قطر ١٦٠ مم
1.3	UPVC Pipe 10 BAR Daim. 200mm	10	LM	1,500.00	15,000	مواسير UPVC ضغط ١٠ بار قطر ٢٠٠ مم
1.4	UPVC Pipe 10 BAR Daim. 250mm	20	LM	1,750.00	35,000	مواسير UPVC ضغط ١٠ بار قطر ٢٥٠ مم
1.5	UPVC Pipe 10 BAR Daim.300mm	160	LM	1,900.00	304,000	مواسير UPVC ضغط ١٠ بار قطر ٣٠٠ مم



Sr. #	DESCRIPTION	Quant	Unit	Unit rate	Total (LE)	الرقم	التبند
		الكمية	الوحدة	سعر الوحدة بالجنيه	الأجمالي بالجنيه		
2-	SEWAGE PIPE LINE AT DEAPTH OVER 3.5 METER with length meter: Supply, excavation and install UPVC pipes in diameters of 110,160,200,250mm and excavation, install of 300mm pipes and all are 10 bar pipes ,this with the connection to the manholes along with closing and grouting around pipes and extend the pipes from manholes 2 meters inside the building and finish the work completely as per the drawings and industry assets all pipes are from Local market and from the approved manufacturers listed by the Great Cairo sewage company. The item price includes: The item price includes: supply and install Tess, elbows and sockets Breaking the asphalt with any thickness Excavation in any soil type "rocky, stony, concrete....etc. " Removal of the surface water and the underground water with authority coordination Supply and backfill under, around and above pipes with clean sand free of strange Particles till the asphaltting start level and with compaction-watering as per the Specifications and the instructions of the supervisor engineer Supporting the trench sides as per supervising engineer and as per the drawings along with providing the excavation warning signs and following the professional health and safety regulations in all the work phases Apply the pressure testing Removal of excavation products to the public waste dumps. Making any other works were not stated above and are close related to the installation and testing as per the technical specifications and According to the assets of the Industry					-2	خطوط الصرف على اعماق اكبر من ٣.٥ متر بالمتر الطولي: توريد وحفر وتركيب مواسير UPVC قطر ١١٠ و ١٦٠ و ٢٠٠ و ٢٥٠ مم وتركيب وحفر مواسير قطر ٣٠٠ مم و الجميع ضغط ١٠ بار مع التوصيل على المطابق و التكفيل و التحيش و نهي العمل كاملا مما جميعة و حسب الرسومات المرفقة مع مد المواسير من المطابق الي داخل المبني لمسافة ٢ متر و حسب اصول الصناعة على ان تكون المواسير من السوق المحلي و من المصنعون المعتمدون لدي مرفق الصرف بالقاهرة الكبرى و سعر البند يشمل :- توريد وتركيب كيما و مشركات و جلب تكسير طبقات الاسفلت بأي سمك الحفر في جميع انواع التربة "صخرية او زلطيه او خرسانية الخ" ترج المياه السطحية او الجوفية و التنسيق مع الحي اصرف نتج الزرع الجوفي التوريد و الردم اسفل و حول و فوق المواسير بالرمال النظيفة الخالية من الشوائب حتي مشوب الاسفلت مع الدمك و الرض بالمياه طبقا للمواصفات و لتعليمات مهندس الاشراف سند جوانب الحفر حسب تعليمات مهندس الاشراف و الرسومات المرفقة مع وضع اشارات التحذير من الحفر و اتباع تعليمات الصحة و السلامة المهنية في جميع مراحل العمل عمل اختبار للخطوط ازالة نتج الحفر و نقله للمقلب العمومي ي اصال اخري لم تذكر عاليه وتقع في نطاق التركيب و الاختبار طبقا للمواصفات و اصول الصناعة
2.1	UPVC Pipe 10 BAR Daim. 110mm	10	LM	1,500.00	15,000	2.1	مواسير UPVC ضغط ١٠ بار قطر ١١٠ مم
2.2	UPVC Pipe 10 BAR Daim. 160mm	20	LM	1,786.95	35,739	2.2	مواسير UPVC ضغط ١٠ بار قطر ١٦٠ مم
2.3	UPVC Pipe 10 BAR Daim. 200mm	15	LM	2,200.00	33,000	2.3	مواسير UPVC ضغط ١٠ بار قطر ٢٠٠ مم
2.4	UPVC Pipe 10 BAR Daim. 250mm	85	LM	2,410.00	204,850	2.4	مواسير UPVC ضغط ١٠ بار قطر ٢٥٠ مم
2.5	UPVC Pipe 10 BAR Daim.300mm	120	LM	2,710.00	325,200	2.5	مواسير UPVC ضغط ١٠ بار قطر ٣٠٠ مم
3-	SEWAGE MANHOLE WITH DEPTH UP-TO 3.5 METER Excavation and installation of precast manholes with supply and install the concrete base(PC&RC) as per the drawings and the supervising engineer and industry assets The item price includes: painting all concrete with petoumenous paint three layers					-3	مطابق على عمق لا يزيد عن ٣.٥ متر حفر وتركيب مطابق من الخرسانة سابقة التجهيز مع توريد و عمل القاعده الخرسانية اسفلها (عديه و مسلحه) حسب الرسومات المرفقة و حسب اصول الصناعة و تعليمات مهندس الاشراف و سعر البند يشمل :- دهن القواعد و المطابق بثلاثة اوتشال عزل بيتومين سائل

BADRY
MEP

Sr. #	DESCRIPTION	Quant	Unit	Unit rate	Total (LE)	الرقم	البيد
		الكمية	الوحدة	سعر الوحدة بالجنيه	الإجمالي بالجنيه		
	<p>Breaking the asphalt with any thickness</p> <p>Excavation in any soil type "rocky, stony, concrete....etc. "</p> <p>Removal of the surface water and the underground water with authority coordination</p> <p>Supply and backfill under, around manholes with clean sand free of strange Particles till the asphaltting start level and with compaction-watering as per the Specifications and the instructions of the supervisor engineer</p> <p>Supporting the trench sides as per supervising engineer and as per the drawings along with providing the excavation warning signs and following the professional health and safety regulations in all the work phases</p> <p>penching of manholes bottom as per industry assets</p> <p>Testing of manholes</p> <p>Removal of excavation products to the public waste dumps.</p> <p>Making any other works were not stated above and are close related to the installation and testing as per the technical specifications and According to the assets of the Industry</p>						<p>تكسير طبقات الإسفلت بأي سمك</p> <p>الحفر في جميع أنواع التربة "صخرية او زلطية او خرسانية الخ"</p> <p>نزع المياه السطحية أو الجوفية أو التنسيق مع الحي اصرف ناتج النزح الجوفي</p> <p>التوريد و الردم اسفل و حول و فوق المطابق بالرمال النظيفة الخالية من الشوائب حتي منسوب الإسفلت مع الدمك و الرش بالمياه طبقا للمواصفات و لتعليمات مهندس الاشراف</p> <p>سند جوانب الحفر حسب تعليمات مهندس الاشراف و الرسومات المرفقة مع وضع اشارات التحذير من الحفر و اتباع تعليمات الصحة و السلامة المهنية في جميع مراحل العمل</p> <p>تخليق المجاري بقاع المطبق حسب اصول الصناعة</p> <p>عمل اختبار للمطابق</p> <p>ازاله ناتج الحفر و نقله للمقابل العمومي</p> <p>في أعمال اخري لم تذكر عاليه وتقع في نطاق التركيب و الاختبار طبقا للمواصفات وأصول الصناعة</p>
3.1	Manhole of depth till 3.5 meter	10	LS	14,000.00	140,000.00	3.1	سطح بعمق حتى 3.5 متر
4-	<p>SEWAGE MANHOLE WITH DEPTH MORE THAN 3.5 METER</p> <p>Excavation and installation of precast manholes with supply and install the concrete base(PC&RC) as per the drawings and the supervising engineer and Industry assets</p> <p>The item price includes:</p> <p>painting all concrete with polychromous paint three layers</p> <p>Breaking the asphalt with any thickness</p> <p>Excavation in any soil type "rocky, stony, concreteetc. "</p> <p>Removal of the surface water and the underground water with authority coordination</p> <p>Supply and backfill under, around manholes with clean sand free of strange Particles till the asphaltting start level and with compaction-watering as per the Specifications and the instructions of the supervisor engineer</p> <p>Supporting the trench sides as per supervising engineer and as per the drawings along with providing the health and safety regulations in all the work phases</p> <p>penching of manholes bottom as per industry assets</p> <p>Testing of manholes</p> <p>Removal of excavation products to the public waste dumps.</p> <p>Making any other works were not stated above and are close related to the installation and testing as per the technical specifications and According to the assets of the Industry</p>					4-	<p>مطابق علي عمق يزيد عن 3.5 متر</p> <p>حفر وتركيب مطابق من الخرسانة سابقه التجهيز مع توريد و عمل القاعه الخرسانيه اسفلها (عاديه و مسلحه) حسب الرسومات المرفقه بحسب اصول الصناعة و تعليمات مهندس الاشراف و سعر البيد يشمل :-</p> <p>دهان القواعد و المطابق بثلاثه اوتش عزل بيتومين سائل</p> <p>تكسير طبقات الإسفلت بأي سمك</p> <p>الحفر في جميع أنواع التربة "صخرية او زلطية او خرسانية الخ"</p> <p>نزع المياه السطحية أو الجوفية أو التنسيق مع الحي اصرف ناتج النزح الجوفي</p> <p>التوريد و الردم اسفل و حول و فوق المطابق بالرمال النظيفة الخالية من الشوائب حتي منسوب الإسفلت مع الدمك و الرش بالمياه طبقا للمواصفات و لتعليمات مهندس الاشراف</p> <p>سند جوانب الحفر حسب تعليمات مهندس الاشراف و الرسومات المرفقة مع وضع اشارات التحذير من الحفر و اتباع تعليمات الصحة و السلامة المهنية في جميع مراحل العمل</p> <p>تخليق المجاري بقاع المطبق حسب اصول الصناعة</p> <p>عمل اختبار للمطابق</p> <p>ازاله ناتج الحفر و نقله للمقابل العمومي</p> <p>في أعمال اخري لم تذكر عاليه وتقع في نطاق التركيب و الاختبار طبقا للمواصفات وأصول الصناعة</p>
4.1	Manhole of depth more than 3.5 meter	9	LS	17,777.78	160,000.00	4.1	سطح بعمق اكبر من 3.5 متر
Total					1,315,789		الإجمالي
% Discount				8.80%	115,789		خصم على إجمالي المقايمة %
TOTAL AFTER DISCOUNT					1,200,000		الإجمالي بعد الخصم

BADRY MEP Co.

BADRY GROUP Member - Code 010

P.O.Box 1527 Alf Maskan
Cairo 11777, Egypt
Phone 22958530 Fax 22995860

Quotation

DATE 19/08/2015
Quotation # 22109 (Rev 01)
Customer ID 2129

Quotation For:

Project Nile Corniche Project - External Sewage Line
Name Eng. Yasser Seddik
Company/Auth. CCC Co.
Address Nile Corniche, Cairo
Tel / Fax +202 25942600 Ext. 247
Cel / Mob +20 1122005487
E-Mail Yasser Seddik <YSeddik@ccc.com.eg>

Quotation valid until: 30/09/2015

Prepared by: Gehad Salah

Terms or Special Cond.; 15% In Advance, 55% Supply Invoices, 20% Install Invoices, 10% Delivery T&C
Delivery 10 Weeks From W.O & Advanced Payment, Approved WSDs Receipt (2W)

SALES PERSON	QUOTE NUMBER	DELIVERY	SHIP VIA	SITE	TERMS
Gehad Salah	22109 / 010 / 2129	10 Weeks (10W)	LAND - DTD	Cairo	Due on Order

QUANTITY	DESCRIPTION	RATE (EGP)	ADD (EGP)	TOTAL AMOUNT
1	Pkg # 01, External Sewage Line (Re-Measure)	1,150,000	0	EGP 1,150,000

Main Contractor is Required to Provide at Site (Our Prices Exclude Any of);

1- Site Facilities, Power, Lighting, Water, Safety and Security

2- Scaffolds, Lisences, Permits from Any /others

3- Designs, Printing, Finishing, Landscape or Any Others

4- Closed Equipments Storage Area, Site Office, Entrance & Exist Fees

SUBTOTAL EGP 1,150,000

TAX & INSUR RATE 0.00%


TAX & INSUR EGP 0

Non Refund MOBILZATION EGP 50,000.00

TOTAL EGP 1,200,000

If you have any questions concerning this quotation contact Ms. Jasmin Salah
Tel +20 2 229 58 530, Fax +20 2 229 95 860, hasoegypt@gmail.com, badry@badrygroup.com

THANK YOU FOR YOUR BUSINESS!

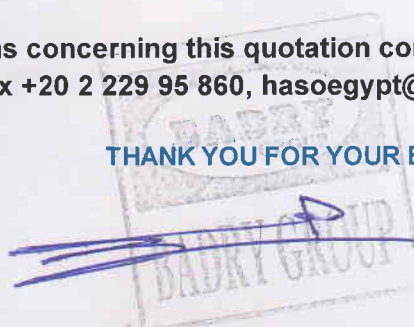

BADRY
Group



MANHOLE S1

MANHOLE S2

MANHOLE S3

MANHOLE S4

MANHOLE S5







BASE DIMENSIONS INDICATED TO BE FOR CONSTRUCTION TO BE CHECKED ON SITE FOR PROPER FIT AND FINISH

BASE DIMENSIONS INDICATED TO BE FOR CONSTRUCTION TO BE CHECKED ON SITE FOR PROPER FIT AND FINISH

BASE DIMENSIONS INDICATED TO BE FOR CONSTRUCTION TO BE CHECKED ON SITE FOR PROPER FIT AND FINISH

BASE DIMENSIONS INDICATED TO BE FOR CONSTRUCTION TO BE CHECKED ON SITE FOR PROPER FIT AND FINISH

BASE DIMENSIONS INDICATED TO BE FOR CONSTRUCTION TO BE CHECKED ON SITE FOR PROPER FIT AND FINISH



PLAN VIEW

PLAN VIEW

PLAN VIEW

PLAN VIEW

PLAN VIEW



PH

NOTES:
1. ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE SPECIFIED.
2. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE SPECIFIED.
3. ALL DIMENSIONS ARE TO BE CHECKED ON SITE FOR PROPER FIT AND FINISH.
4. ALL DIMENSIONS ARE TO BE CHECKED ON SITE FOR PROPER FIT AND FINISH.

Table with project details including project name, location, and dates.

Table with project details including project name, location, and dates.



PROJECT: THE FILE COMPLEX AT MEDICAL CITY, DUBAI
CLIENT: QATAR DEAR EGYPT
DESIGNER: MGA-HKS
ARCHITECT: ARUP

ENGINEER OF RECORD: BADRY GROUP
CONSOLIDATED CONTRACTORS GROUP

DATE: 14/08/2014
DRAWN BY: [Signature]
CHECKED BY: [Signature]
REVIEWED BY: [Signature]
APPROVED BY: [Signature]

Table with project details including project name, location, and dates.



Construction Contract

Between

Agricultural Cooperative Development International
ACDI/VOCA

Address: 25 Road 10, 1st floor, Mahata Square, Maadi, Cairo
Office phone: 23596107



And


BADRY Construction Co.

Affiliated to BADRY Group for Development and Investment
6B, Six October Street, Manshiet Al-Sad Al-Aaly, AL-Salam, Cairo
Office Phone: +20 (2) - 22958530/22955487

Implementation period	55 Days
Total value of the Contract	LE 774,000
Prime Agreement Number	263-A-00-08-00013-06
Project Job Code	J576A
Contract Number	CC1-2013

This Lump Sum Construction Works **Contract** is accepted and shall be binding on both parties. An officer signing this document on behalf of the **Contractor** warrants that he/she has full authority to sign this document.

ACDI/VOCA FIRST PARTY	BADRY Construction Co. SECOND PARTY
	
Gevorg Adamyan Managing Director	Eng. Hany El-Badry Operations Manager
Date: <u>24 May, 2013</u>	Date:



شهادة سابقة أعمال

تشهد إدارة المنظمة الدولية لتنمية التعاون الزراعي (ACDI / VOCA) "منظمة دولية غير هادفة للربح NGO" والكائنة في ٢٥ شارع ١٠ بالمعادي - القاهرة، مصر.

بأن شركة البدرى للإنشاءات المتخصصة (BADRY Construction) / مجموعة البدرى للتنمية والاستثمار -- قد قامت في ٢٠١٣م، بتنفيذ أعمال التصميم والبناء والتنفيذ والتسليم لمركز تجميع الحاصلات الزراعية بإسنا - محافظة الأقصر.

وذلك طبقا للشروط والمواصفات الفنية للمشروع، وبأسلوب Design & Built وكما تضمن عملها تقديم واعتماد الرسومات التنفيذية للمشروع وإنهاء تنفيذ وتسليم الأعمال بعد المعايرة والإختبار بنجاح مما جميعه بنظام تسليم مفتاح Turn-Key.

وبقيمة إجمالية للأعمال المنفذة قدرها ٧٧٤,٠٠٠ ألف جم (فقط سبعمائة وأربعة وسبعون ألف جنيه مصرى لا غير) تم سدادها للمقاول.

وقد أعطيت هذه الشهادة بناء على طلب الشركة المنفذة ودون مسئولية علينا.

وهذه شهادة منا بذلك،

المنظمة الدولية لتنمية التعاون الزراعي

ACDI / VOCA



تحريرا في ٢٠ / ١١ / ٢٠١٣

شهادة سابقة أعمال

اليوم الثلاثاء الموافق ٢٠١٩/٠٧/٣٠

تشهد مؤسسة التصميمات الهندسية (إنج ديزاينز) بوصفها استشاري مشروع روتنج فارمز بالفيوم بأن السادة المقاول / مجموعة البدرى للتنمية والاستثمار - شركة البدرى لأشغال البنية التحتية والتأسيسية قد نفذت بنجاح أعمال شبكات ومرافق وربط الكهرباء والمياه والصرف والبيوجاز والطاقة الشمسية والسخانات الشمسية لمنشآت المشروع

وقد جى استلام الأعمال بصورة فنية مرضية ودونما تأخير.

وهذه شهادة منا بذلك ..

وتفضلوا بقبول وافر التقدير والاحترام..

المهندس الاستشاري
عامر على عابدين





عقد اتفاق رقم (06 / AL-Azhar / 2017)

لتنفيذ الأعمال الكهربائية

بمشروع الأزهر الشريف- بمدينة البحوث الجديدة

انه في يوم الاثنين الموافق 2017/ 01 / 25 م تحرر هذا العقد بين كل من :-
اولا :- شركة المراسم الدولية للتطوير العمراني
و مقرها 14 شارع الثورة - الدقى - الجيزة - جمهورية مصر العربية ، ويمثلها في توقيع العقد السيد المهندس الاستشارى / خالد
محمد بن لادن ، بصفته نائب رئيس مجلس الإدارة ، والمشار إليها في بنود العقد (بالطرف الأول).
(طرف اول)

ثانياً :- مجموعة البدرى للتنمية والإستثمار
سجل تجارى رقم: 16094 بطاقة ضريبية رقم: 279-371-500
و مقرها القانوني: 6 ب ش 6 أكتوبر شقة 5 الدور الثالث -جسر السويس- منشية السد العالى السلام - القاهرة .
ويمثلها فى التوقيع على العقد السيد المهندس / البدرى محمد محمد إسماعيل ، بصفته مدير الشركة وله حق الإدارة و التوقيع
والمشار إليها في بنود العقد (بالطرف الثاني).
(طرف ثاني)

تمهيد

حيث أن الطرف الأول يقوم بتنفيذ مشروعات الأزهر المختلفة والمشار إليه فى بنود العقد (بالمشروع) ، وذلك وفقا لشروط العقد
والمواصفات الفنية والرسومات وقوائم الكميات وجميع مستندات المشروع والموضحة تفصيلاً بالبند الثاني من هذا العقد وتعليمات الاستشارى
المشرف والمشار إليه فى بنود العقد (بالمهندس) وحيث أن الطرف الثاني قد أبدي كامل رغبته لتوريد وتنفيذ واختبار وتسليم وضمان الأعمال
الكهربائية شاملاً توريد وتركيب جميع المستلزمات وعمل الاعتمادات الفنية للاستشارى "المهندس" وعمل العينات اللازمة وكل ما يلزم لنهـ
الاعمال بموقع المشروع طبقاً لشروط هذا العقد ومرفقاته وبعد معاينته لموقع المشروع على الطبيعة والإمام الكامل بالموقع وطبيعته وأماكن
إدخال المعدات بالمشروع بنفسه وبواسطة خبراءه ومهندسيه المعاينة التامة النافية لكل جهالة ، كما اطلع على الشروط والمواصفات المقررة
لهذا المشروع وقبل الالتزام بها التزاماً تاماً وفق تعليمات ممثلي الطرف الأول و المهندس فيما يخص عمله الموصوف بهذا العقد مقرا انه
مؤهل لتنفيذ مثل هذه الأعمال

و عليه فقد وافق طرفي هذا العقد علي تحريره وفقاً للشروط التالية :-

البند الأول :- شروط العقد العام :-

- 1-1 يلتزم الطرف الثاني بتنفيذ وإنهاء الأعمال موضوع العقد بمعرفته وتحت مسؤوليته وبما يتفق مع بنود وشروط العقد ومرفقاته وتنفيذ كافة
تعليمات الطرف الأول والمهندس .
- 2-1 ومن المتفق عليه بين الطرفين ان جميع التزامات الطرف الأول والمحددة تفصيلاً في مستندات العقد بالكامل و فيما يخص المسؤولية
العقود والمرفقاته
العقد ومرفقاته
العقد ومرفقاته



Handwritten signature in blue ink.



٢٠ محمود سامى البارودى - مدينة نصر - القاهرة - جمهورية مصر العربية
20 Mahmoud Samy AlBaroudy - Nasr City - Cairo - Egypt
Tel :+ 202 - 26720011/12/13/14/15 Fax :+ 202-26720016/17
Email : marasem@marasem-cairo.com



عدد اطلاق رقم (06 / 2017 / Al-Azhar)

Dated In 25/1/2017

مقايمة الأعمال الكهربائية- مرفق رقم 3

DIVISION 26 ELECTRICAL

Item	Description	Qty	Unit	Unit Rate	Amount EGP
ELECTRICAL INSTALLATIONS					
General Requirements:					
Price rates have to include but not limited all Builder works, reinforced concrete pads, openings, sleeves, frames, bases, sealant, fire barrier materials, supports, Seismic restraints, formworks, vibration isolators, marking, labels, operational and maintenance manuals, guarantee and spare parts for all electrical equipments as stated in the contract documents, coordination with other trades and connecting to all systems. main feeders & infrastructure networks (if required) including all accessories, as per drawings and specifications					
POWER INSTALLATION					
Supply, install, testing and commissioning of LV Feeders including conduits, cable trays, accessories connections, marking, sleeves and opening, to the corresponding panel boards as shown in the drawings, specifications and workmanship.					
B	1-3.5/c 35mm ² XLPE/PVC + 1-16mm ² cu. grd. on cable tray	75	M	585	43875
C	1-3.5/c 10mm ² XLPE/PVC + 1-10mm ² cu. grd. on cable tray	75	M	186	13950
To Collection EGP.					57825
PANELBOARDS					
Supply, install, testing and commissioning of Panel boards complete with all breakers, copper bars, equipments, fixing and all accessories complete as shown in the drawings, specifications and workmanship.					
A	Panelboard DP-NB	1	No	104,718	104718
B	Panelboard LPG1	1	No	7,592	7592
C	Panelboard LP11	1	No	7,192	7192
D	Panelboard LP21	1	No	7,192	7192
E	Panelboard LP31	1	No	7,192	7192
F	Panelboard LP41	1	No	7,592	7592
G	Panelboard PPG 1	1	No	11,500	11500
H	Panelboard PP11	1	No	10,000	10000
J	Panelboard PP21	1	No	10,000	10000
K	Panelboard PP31	1	No	10,000	10000
L	Panelboard PP41	1	No	12,000	12000
To Collection EGP.					194978
POWER PROVISION (EQUIPMENT POINTS):					
Supply, install, testing and commissioning of Equipment point including conduits, boxes & fittings, marking, sleeves, opening, and wiring connections from the corresponding panel boards or between points, as required as shown on drawings and specifications.					
A	Power provision for EF	51	No	250	12750
B	Power provision for EWH-B-1	15	No	1,300	19500
C	Power provision for EWH-B-2	5	No	1,200	8000
D	Power provision for Hot plate	10	No	2,381	23810
To Collection EGP.					62080
DISCONNECT SWITCHES:					
Supply, install, testing and commissioning of Disconnect switches including boxes, fittings, installation, sleeves, opening and marking complete as shown on drawings, specifications and workmanship.					
A	Disconnect switch, 20A, 3P, 380V, weather proof type	10	No	1,700	17000
B	Disconnect switch, 32A, 1P, 220V, weather proof type	15	No	320	4800
B	Disconnect switch, 16A, 1P, 220V, weather proof type	5	No	280	1400
To Collection EGP.					23200
RECEPTACLES:					
Supply, install, testing and commissioning of Receptacle including cover plate, devices, boxes, conduits and wiring to the corresponding panel board or between points as shown on drawings, specifications and workmanship.					
A	Single receptacle 10A, 2P, 220V, grd.	362	No	500	181000
B	Single receptacle 10A, 2P, 220V, grd., weather proof type	12	No	550	6600
C	Single receptacle 10A, 2P, 220V, grd., weather proof type (For Refrigerator).	10	No	760	7600
D	Single receptacle 16A, 2P, 220V, grd., weather proof type (For Washing machine).	10	No	1,330	13300
E	Single receptacle 10A, 2P, 220V, grd.	304	No	606	184224
F	Duplex receptacle 10A, 2P, 220V, grd. (For SCC).	1	No	716	716
G	Duplex receptacle 10A, 2P, 220V, grd. (For DVR)	1	No	809	809
To Collection EGP.					394249
JUNCTION BOX FOR POWER CIRCUITS:					
Supply, install, testing and commissioning of Junction box including conduits, boxes, wiring to the corresponding panelboard as shown on drawings, specifications and workmanship.					
K	Junction box for Ceiling Fans "Ceiling mounted"	105	No	480	50400
K	Junction box "Wall mounted"	13	No	2,000	26000
To Collection EGP.					76400



ISO 9001: 2008

ISO 14001: 2004

Accreditation No. 017
OHSAS 18001:2007

٢٠ محمود سامي البارودي - مدينة نصر - القاهرة - جمهورية مصر العربية
20 Mahmoud Samy AlBaroudy - Narsi City - Cairo - Egypt
Tel :+ 202 - 26720011/12/13/14/15 Fax :+ 202-26720016/17
Email :marasem@marasem-cairo.com

9/7




Item	Description	Qty	Unit	Unit Rate	Amount EGP
LIGHTINGS					
	Supply, install, testing and commissioning of Lighting points including conduits, boxes, junction box, marking, cable trays and wiring to the corresponding panel board as shown on drawings, specifications and workmanship.				
A	Lighting points	736	No	261	192096
	Supply, install, testing and commissioning of Lighting fixture including lamps, Transformers, all necessary accessories and electrical connection, complete in all aspects as shown on drawings, specifications and				
B	Type N1	16	No	761	12176
C	Type B2	11	No	886	9746
D	Type B3	83	No	809	67147
E	Type B6	468	No	1,016	475488
F	Type B6E	28	No	1,844	51632
G	Type B7E	24	No	1,947	46728
H	Type B8	64	No	1,005	64320
J	Type W1	7	No	325	2275
K	Type W2	7	No	350	2450
L	Type EX	13	No	952	12376
M	Type EX1	10	No	952	9520
N	Type EX3	5	No	1,440	7200
To Collection EGP.					953154

SWITCHES:					
	Supply, install, testing and commissioning of Switches including cover plate, devices, boxes, wiring and connection as shown on drawings, specifications and workmanship.				
A	Switch single way, one-gang, 10A, 220V IP 20	67	No	258	17286
B	Switch single way, one-gang, 10A, 220V (WP) IP 55	16	No	422	6752
C	Switch single way, two-gang, 10A, 220V, IP20	94	No	314	29516
D	Switch single way, two-gang, 10A, 220V (WP) IP 55	5	No	546	2730
E	Switch one way, three-gang, 10A, 220V IP 20	1	No	386	386
F	Switch two way, one-gang, 10A, 220V IP 20	34	No	430	14620
To Collection EGP.					71290

GROUNDING SYSTEM					
	Supply, install, testing and commissioning of Grounding system, complete with rods, pits, bare copper cables, thermo weld connections, fixing, marking, sleeves, base, including support junction clamp, cad weld connection, rebar connection, PEBs and all necessary accessories as shown on drawings, specifications and workmanship.				
A	Grounding rod copper solid 20mm diameter x 3m long. (grounding)	8	No	1,713	13704
B	1-95mm ² bare copper grounding conductor buried in ground for clean earth system (grounding) 1000 mm below finish graded & 1000 mm from floor boundary	220	M	315	69300
To Collection EGP.					83004
GENERAL ITEMS OF WORKS					1,916,160
DIVISION 27					
COMMUNICATIONS					

General Requirements:					
	Price rates have to include but not limited all Builder works, reinforced concrete pads, openings, sleeves, frames, bases, sealant, fire barrier materials, supports, formwork, vibration isolators, marking, labels, operational and maintenance manuals, guarantee and spare parts for all electrical equipments as stated in the contract documents, Cable trunks & Ladders C/W all their accessories, Grounding and bounding of all technology system, coordination with other trades and connecting to all systems and also connecting the technology cabling infrastructure installations to site (if required) including all accessories as per the standard, specifications and drawings				

STRUCTURED CABLING SYSTEM					
	Supply, install, testing, commissioning and put into operation Structured cabling system and all necessary accessories to finish works as per the standard, specification and as shown on drawings including the following: CAT 6				
A	48 Port Switch including cables, ports and modules capability	1	No	20,000	20000
B	CAT6 Patch Panel 24 Port with patch cord, cable management and including all necessary accessories.	3	No	5,966	17898
C	Wall mounted RJ-45 Patch Panel 24 Port with patch cord, cable management and including all necessary accessories.	1	No	3,357	3357
D	48 Port RJ-45 Patch Panel 24 Port with patch cord, cable management and including all necessary accessories.	39	No	834	32526
E	48 Port RJ-45 Patch Panel 24 Port with patch cord, cable management and including all necessary accessories.	5	No	834	4170
F	TEL Terminal Block (Administration G02-XX)	1	No	1,059	1059
G	24 Port RJ-11 Telephone Outlet with face plate connecting block, labeling, conduits, telephone cable, 2 pair Cat 3, backbox, patch panel, junction box and all necessary accessories to finish works as per standard, specification, and drawings.	2	No	432	864
To Collection EGP.					79874






Item	Description	Qty	Unit	Unit Rate	Amount EGP
MATV SYSTEM					
	Supply, install, testing, commissioning and put into operation MATV system including cables, conduits cable tray, ladder, shafts and all necessary accessories to complete as required and as per specifications and drawing including following:				
A	NileSat dish (10.70 12.75 GHZ) with Quad LNB, 1.2 M Diam	1	No	1,825	1825
D	TV Outlet with conduits, coaxial cable, back box with junction box and all necessary accessories to finish works as per standard, specification and drawing.	2	No	1,411	2822
To Collection EGP					4647
PUBLIC ADDRESS SYSTEM					
	Supply, install, testing, commissioning and put into operation Public address system including conduits, cables all necessary accessories and connection with other systems to complete as required and as per specifications and drawing including following:				
A	Public address system rack 19" floor Mounted 60*60 mm	1	No	14,075	14075
B	DVD player	1	No	4,382	4382
C	AM/FM radio tuner with antenna	1	No	8,234	8234
D	Power amplifier 250 watt	1	No	28,134	28134
E	Desktop paging microphone	1	No	4,539	4539
F	Ceiling mounted indoor loudspeaker (6 watts)	36	No	1,229	44244
To Collection EGP					103608
INTERCOM SYSTEM					
	Supply, install, testing, commissioning and put into operation intercom system including conduits, cables all necessary accessories to complete as required and as per specifications and drawing including following:				
A	Master intercom station (indoor unit) with power supply	1	No	5,712	5712
B	Wall mounted audio intercom slave station	8	No	809	6472
C	Junction Box at each floor	6	No	280	1680
To Collection EGP					13884
GENERAL ITEMS OF WORKS					201 993
DIVISION 28					
ELECTRONIC SAFETY & SECURITY					
General Requirements:					
	Price rates have to include but not limited all Builder works, reinforced concrete pads, openings, sleeves, frames, bases, sealant, fire barrier materials, supports, formwork, vibration isolators, marking, labels, operational and maintenance manuals, guarantee and spare parts for all electrical equipments as stated in the contract documents, Cable trunks & Ladders C/W all their accessories, Grounding and bonding of all technology system, coordination with other trades and connecting to all systems and also connecting the technology cabling infrastructure installations to site OSP (if required) including all accessories as per the standard, specifications and drawings.				
CCTV SYSTEM					
	Supply, install, testing, commissioning and put into operation CCTV system including conduits, cables connecting to LAN and all necessary accessories to complete as required and as per specifications and drawing including following:				
A	Digital video recorder DVR 16 input	1	No	23,986	23986
B	CCTV monitor 21" LCD	1	No	4,700	4700
C	CCTV fixed camera analog indoor wall mounted (vari-focal lens)	1	No	3,802	3802
D	CCTV Cameras provision	10	No	1,128	11280
To Collection EGP					43768
FIRE ALARM SYSTEM					
	Supply, install, testing, commissioning and put into operation Fire alarm system including conduit, boxes, (2x1.5 mm) fire alarm cable (as per manufacture recommendation), connection to central monitoring building, interface with other systems and all necessary accessories to finish works as per the standard, specification and as shown on drawings including the				
A	Addressable Fire alarm control panel (FACP-1) 2 loops with battery and charger	1	No	27,000	27000
B	Addressable optical smoke detector	117	No	1,007	117819
C	Addressable optical smoke detector with fault isolator	15	No	1,220	18300
D	Addressable optical heat detector	6	No	1,080	6480
E	Fire alarm sounder with beacon	11	No	1,700	18700
F	Fire alarm sounder with beacon "WP"	1	No	2,180	2180
G	Fire alarm manual call point	11	No	1,400	15400
H	Fire alarm manual call point "WP"	1	No	1,400	1400
I	Monitor module	5	No	1,080	5400
J	Switch	5	No	1,080	5400
To Collection EGP					218079
GENERAL ITEMS OF WORKS					261847
TOTAL					2,380,000
ضريبة مضافة 5 %					119,000
TOTAL Including VAT					2,499,000
TOTAL Including VAT for 2 Building					4,998,000

BADRY GROUP



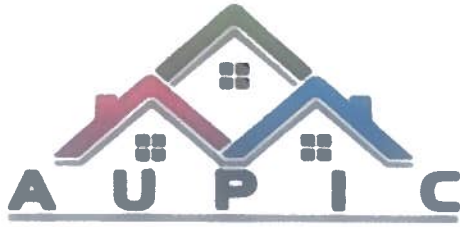

AUPIC Projects & Investments Co.

P.O. Box. 120 New Maadi, Cairo, Egypt

Tel +202 25 17 79 80 / 81. Fax +202 25 00 63 73.

E-Mail: Aupic@Aupic-Projects.com

Oct. 30, 2018

Dear Ms. BADRY INFRA Co.,

With our receipt of final invoice indicating that you complete the cycle of service to on project;
"The Infrastructure Package & Utilities Networks, Tie-Inn, Electricity, Fiber Cabling, Networking, CCTV, Irrigation, Water and Main Sewer connections - all of Paradise Complex facility including Mall, Beach club house, Café and Parking area at Marsa Allam, Red Sea".

We address this letter to whom it may concern that your company has completed on time and without delay the implementation and delivery of the aforementioned works, amounted 19,206,894 Millions EGP, which were received in good condition and in accordance with the technical standard specifications.

Sincerely,

Mr. Ali Raheb

Paradise Complex PM

AUPIC Projects, Inc.



Handwritten signature in blue ink, appearing to be 'Ali Raheb'.



شركة هاسو للمقاولات والتنمية
HASO - EGYPT

شهادة سابقة أعمال

تنفيذ أعمال وشبكات البنى التأسيسية (الإنفرا) كومباوند خاص قرية اللوتس السياحية بالاسماعيلية

إلى من يهمه الأمر،

نشهد نحن نحن شركة هاسو للمقاولات والتنمية HASO-EGYPT ،

بتنفيذ شركة / البدرى لأشغال البنية التحتية BADRY INFRA

لأعمال وشبكات البنى التحتية التأسيسية بكمباوند A4 الخاص بقرية اللوتس السياحية

وشملت الأعمال الشبكات المغذية والربط وتوصيلات المرافق (كهرباء - فايبر - مياه - صرف - ري)

ضمن مقاولتنا - لحساب الجهة المالكة للمشروع "شركة اللوتس للقرى السياحية"

وتم تنفيذ الأعمال واستلامها بصورة مرضية وفي الوقت المحدد

وهذه شهادة منا بذلك

وتفضلوا بقبول فائق الاحترام ،،،

مدير المشروعات

محمد خليل

م/ محمد خليل



شهادة سابقة أعمال

الى من يهمله الأمر،

تشهد شركة استثمارات المشروعات العمرانية المتطورة (أيوبك - AUPIC) بأن شركة البدرى للأعمال الكهروميكانيكية BADRY MEP قد تعاقدت مع شركتنا كمقاول باطن وقام بتنفيذ أعمال الإليكتروميكانيك لمشروع معهدى / العالى للحاسب والمعلومات & العالى للغات والترجمة بمدينة الكوثر - سوهاج بإجمالى قيمة العقد ٧,٦٧٨,٦٣٥ فقط سبعة ملايين وستمائة وثمانية وسبعون الفا وستمائة وخمسة وثلاثون جنيها مصريا وأنه قد قام بتنفيذ وتسليم الأعمال بصورة مرضية وفى الموعد المحدد دونما غرامة تأخير.

وقد اشتملت أعمال الإليكتروميكانيك لمقاول الباطن على الأعمال التخصصية الآتية:

- شبكة الكهرباء : تركيب محطة الكهرباء (متوسط - منخفض) وشبكة الكابلات والمحولات والمولد.
- أعمال الكهرباء : توريد وتركيب أعمال الكهرباء والإضاءة والإتصالات الداخلى والخارجى.
- أعمال الأنظمة : توريد وتركيب أنظمة إنذار وإطفاء الحريق وكاميرات المراقبة والصوتيات.
- أعمال التكييف المركزى : تركيب برج التبريد والتشيلرات ووحدات AHU ووحدات FCU .
- شبكات المياه والصرف: تركيب شبكتى المياه والصرف الصحى الخارجية وشبكة اطفاء الحريق.

أتمت شركة البدرى للأعمال الكهروميكانيكية BADRY MEP الأعمال ومراحل العمل السابقة وتم انتهاء فترة الضمان والتسليم النهائى بعد أداء واجبات الصيانة الوقائية لمدة ١٢ شهر.

وقد أعطيت هذه الشهادة بناء على طلب شركة البدرى دونما أى مسئولية على شركة أيوبك.

وهذه شهادة منا بذلك،،

شركة أيوبك

أ / محمد الجمل



صحة
٢٠١٦/٤/٧

شركة استثمارات المشروعات العمرانية المتطورة
(أيوبك) AUPIC
Advanced Urban Projects
Investments Co.

تحريرا فى: ٢٠١٦/٤/٧



33A Mohamed Mazhar St, Zamalek
Tel: +20 2737 1843 | Fax: +20 27360618
mail@tanfeez-eg.com | www.tanfeez-eg.com

عقد مقاولة من الباطن لأعمال الكهرباء

انة في يوم الأربعاء الموافق 2018/2/21

تم التعاقد بين كلا من :-

شركة / تنفيذ للتشطيبات و المقاولات - ش.م.م.
مقرها / 33 شارع محمد مظهر - الزمالك - القاهرة
سجل تجارى رقم / 63606
بطاقه ضريبية رقم / 445316330
ويمثلها فى التعاقد :

السيد الأستاذ / حسام سمير حمزة النشرتى - بصفته رئيس مجلس الإدارة والعضو المنتدب

ويشار اليها في هذا العقد (طرف أول)

شركة / مجموعه البدرى للتنمية والإستثمار
مقرها / 6 شارع 6 أكتوبر جسر السويس السد العالى - السلام - القاهرة
سجل تجارى رقم / 16094
بطاقه ضريبية رقم / 279-371-500
ويمثلها فى التعاقد :

السيد المهندس / هانى البدرى محمد إسماعيل - بصفته مدير العمليات بالشركة
ويشار اليها في هذا العقد (طرف ثاني)

تمهيد

حيث أن الطرف الاول هو المقاول العام للأعمال المسندة إلية من فندق / هيلتون بيراميدز للجولف (هيلتون دريم لاند بيراميدز) ونظرا
لحاجة الطرف الاول موضوع العقد الي إسناد الاعمال للطرف الثاني حيث يتوافر لديه الخبرة اللازمة لتنفيذ الاعمال المسندة الي الطرف
الاول فقد قبل الطرف الثاني القيام بتنفيذ الاعمال .

البند الأول

يعتبر التمهيد السابق والمستندات المرفقه جزء لا يتجزء من هذا العقد





البند الثاني

يلتزم الطرف الثاني بتنفيذ الاعمال المسندة اليه وهي كافة اعمال الكهرباء من مواد خام (مواسير وخرائطم وكبلات ولوح الكهرباء) والتركيب وذلك حسب عرض السعر المرفق المقدم للغرفة حتى التشطيب النهائي والإستلام.

البند الثالث

أ - بالنسبة للعمال :-

- يتعهد الطرف الثاني باستخدام العدد الكافي من العمال المتخصصين والمشرفين لحسن سير العمل كما يتحمل تكاليف نقلهم من والى المشروع .
- يكون الطرف الثاني مسنول عن عماله وعن سلامتهم وعن أية أضرار تحدث لهم أو للغير نتيجة أعمالهم
- يلتزم الطرف الثاني بالقيام بتوفير مكان اقامة لعماله خارج حدود موقع العمل .
- مواعيد العمل فى الفندق من الساعة 8 صباحاً وحتى 5 مساءً ويمكن مد فتره العمل إلى الساعة 8 مساءً فى حاله عدم وجود تكسير أو ضوضاء فى الموقع.

ب - المواد والمهمات والالات والمعدات :-

- يتعهد الطرف الثاني بتوفير جميع المواد والخامات اللازمة للعمل .
- لايجوز للطرف الثاني التصرف فى أى من المواد التي استحضرت بمعرفة لموقع العمل إلا بأذن كتابي من الطرف الاول وموافقه الطرف الاول عليها .

البند الرابع

- (1) يحق للطرف الاول أو من يفوض عنه بمتابعة الاعمال فى مراحل التوريد أو التنفيذ أو أى مرحلة من الاعمال .
- (2) للطرف الاول الحق فى رفض الاعمال غير المطابقة لاصول الصنائه ويتعهد الطرف الثاني بالقيام على حسابة بازالة الاعمال المرفوضة واستبدالها بغيرها فور إستلامه أمرا كتابيا من الطرف الاول بهذا الخصوص .
- (3) الطرف الثاني ملتزم بتسليم جميع الاعمال موضوع العقد فندق /هيلتون بيراميدز للجولف وبحضور الطرف الاول او من يفوضه
- (4) الطرف الثاني ملتزم بالمحافظة على موقع العمل نظيف ويتحمل رفع مخلفات.
- (5) يحق لشركة هيلتون دريم لاند بيراميدز فى الاعتراض على أماكن ومخارج الكهرباء من مفاتيح وبرايذ وإسبوتلايت ومسارات الكهرباء وكل ما يتعلق بالمقاوله وعلى المقاول تنفيذ ما يطلب منه على أكمل وجه والتسليم لإستشارى الفندق.





33A Mohamed Mazhar St, Zamalek
Tel: +20 2737 1843 | Fax: +20 27360618
mail@tanfeez-eg.com | www.tanfeez-eg.com

البند العاشر

يقر كل طرف بأن المحل المختار له هو عنوانه المبين بصدر هذا العقد ويلتزم كل طرف بإخطار الطرف الاخر بأي تغيير يطرأ علي هذا العنوان والا اعتبرت كافة الاخطارات المرسله إليه بالعنوان المحدد بهذا العقد صحيحة ومنتجة لكافة آثارها .


البند الحادي عشر

حرر هذا العقد وجميع مرفقاته من نسختين بيد كل طرف للعمل بموجبها وقد إتفق الطرفان بكامل أهليتهما للتعاقد على ما تقدم وبالشروط عاليه .

التوقيعات

الطرف الثاني

شركة / مجموعه البدرى للتنمية والإستثمار
السيد المهندس / هانى البدرى محمد إسماعيل
مدير العمليات بالشركه

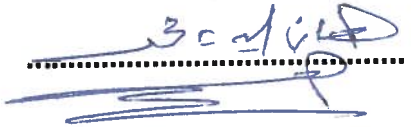



الطرف الأول

شركة / تنفيذ للتشطيبات و المقاولات
السيد الأستاذ / حسام النشرتى
رئيس مجلس الإدارة والعضو المنتدب







**ELEC WORKS
MOCUP ROOM
BOQ NO. 01-R-36, Rev 02**

شركة البترول للأعمال الكهروميكانيكية
إحدى شركات مجموعة البترول للتجارة والاستثمار
BADRY Electro-Mechanical Works Co.

عرض الأسعار المرفق بالعمد

No	Description	Code	Qty	Unit	Rate	Amount
	Electrical works					
	Branch Wiring					
	New as may deem necessary					
	Supply & Install, connect, test and commission electrical branch wiring including wiring, cable, cable tray, conduits, boxes, etc., and all necessary accessories and fittings to complete the work as per design drawings. Approved vendors: - For PVC conduits: Bet al handasa or equal approved - For steel conduits: Smartube or equal approved - For cables: El Swedy (UIC) or equal approved					
A	Lighting outlets					
	Outlet for lighting fixture in PVC conduit		13	nr	700	9,100
B	Sockets outlets					
	Outlet for single phase single socket 16A-220V in PVC conduit		10	nr	800	8,000
	Power outlet for A/C unit in PVC conduit 4*6 mm ²		1	nr	1000	1,000
	Master switch outlet		1	nr	2000	2,000
	Wiring devices					
	New					
	Supply & Install, connect, test and commission the following devices as indicated on drawings including boxes, etc.. All necessary accessories and fitting required to complete the work, as per design drawings. Approved Vendors: - Legrand or equal approved					
A	Lighting switches					
	Master switch		1	nr	300	300
	One way one gang switch, 10A-220V		3	nr	150	450
	One way two gang switch, 10A-220V		3	nr	200	600
	One way three gang switch, 10A-220V		2	nr	250	500
	Two way One gang switch, 10A-220V		2	nr	250	500
B	Sockets and Plugs					
	2P+E Single socket 16A-220V		10	nr	200	2,000
	Disconnect switch 32A (1phase)		1	nr	400	400
	T.V socket		1	nr	300	300
C	Light fixtures as per mockup room					
	Small spot light		7	nr	500	3,500
	Small spot light IP65		3	nr	700	2,100
	Night light		2	nr	900	1,800
	Install only applique for room, room lobby, wardrobe and terraces		1	nr	2450	2,450
SUB-Total (Page 1)						35,000



ELEC WORKS
MOCUP ROOM
BOQ NO. 01-R-36, Rev 02

شركة البدرى للأعمال الكهروميكانيكية
بمبنى شركات مجموعة البدرى للتصميم والاستشارات
BADRY Electro-Mechanical Works Co.

عرض الأسعار المرفق بالعدد

No	Description	Code	Qty	Unit	Rate	Amount
A	General Outlets Inspect, modify, and test all the raceways and cabling for the following outlets as per design drawings: MATV outlet (Coaxial cable)		1	nr	2000	2,000
B	Main distribution board Supply & install, connect, test and commission provisional for distribution boards including all necessary MCB's (10KA) supply (Normal/Emergency) and impulse relay, as per design drawings.		1	nr	3000	3,000
	a- DB panel for rooms one floor (both normal and emergency panels)		1	nr	3000	3,000
	b- DB panel for rooms two floor (both normal and emergency panels)		0	nr	8000	0
	PROVISIONAL SUM install Only emergency electric cables to EDB in the ceiling bulkhead including accessories and other necessary requirements and to be approved by the engineer.		0	nr	38000	0
G	Fire Alarm System Dismantle, fix and re-install or replace as per engineer instructions the following as per drawings:					
	a- Optical type smoke detector (without programming)		0	nr	2000	0
	b- Evacuation speaker		0	nr	2000	0
D	Telephone/Data outlets Supply & install, connect, test, commission telephone outlet including cables (UTP CAT 3) and data outlet including cables (UTP CAT 6), conduits, pull and junction boxes and all accessories required to complete the work.					
	Data outlet		1	nr	2000	2,000
	Telephone outlet		0	nr	2000	0
E	Wiring Devices Supply & install, connect, test, commission telephone fixture consisting of sockets (RJ 11) and data fixture consisting of sockets (RJ 45) and all accessories required to complete the work.					
	Data Fixture		3	nr	400	1,200
	Telephone Fixture		3	nr	400	1,200
F	Additional Items					
1	Supply & install, connect, test USB Charger Outlet, Jack					
1-1	USB Outlet		1	nr	800	800
1-2	USB Face Plate		1	nr	500	500
1-3	USB Jack Cord		1	nr	300	300
2	Electrical Shopdrawing for Room					
2-1	ELEC WSDs - Lighting, Power, LC Systems (2 Sheets)		1	Room	1000	1,000
SUB-Total (Page 2)						15,000
Total (Electrical works) - SUPPLY & INSTALL (Pages; 1 & 2)						50,000

**ELEC WORKS
 HOTEL ROOMS**
UPDATE OFFER - Rev 04

عرض أسعار لغرف الفندق - أعمال كهرباء أساسية

No	Description	Code	Qty	Unit	Rate	Amount
	Electrical works Branch Wiring New as may deem necessary Supply & Install, connect, test and commission electrical branch wiring including wiring, cable, conduits, boxes, etc., and all necessary accessories and fittings to complete the work Approved vendors: - For PVC conduits: Bet al handasa or equal approved - For steel conduits: Smartube or equal approved - For cables: El Swedy (UIC) or equal approved					
A	Lighting outlets Outlet for lighting fixture in PVC conduit		740	nr	490.47	362,950
B	Sockets outlets Outlet for single phase single socket 16A-220V in PVC conduit Power outlet for A/C unit in PVC conduit 3*6 mm ² Master switch outlet		300 34 41	nr nr nr	800 1000 2000	240,000 34,000 82,000
	Wiring devices New Supply & Install, connect, test and commission the following devices as indicated on drawings including boxes, etc.. All necessary accessories and fitting required to complete the work, as per design drawings. Approved Vendors: - Legrand or equal approved					
A	Lighting switches Master switch (Face Plate) One way one gang switch, 10A-220V One way two gang switch, 10A-220V One way three gang switch, 10A-220V Two way One gang switch, 10A-220V		41 93 91 54 48	nr nr nr nr nr	300 150 200 250 250	12,300 13,950 18,200 13,500 12,000
B	Sockets and Plugs 2P+E Single socket 16A-220V (Shocko Socket) Disconnect switch 32A (1phase) T.V socket		372 34 34	nr nr nr	200 400 300	74,400 13,600 10,200
C	Light fixtures as per mockup room Small spot light Small spot light IP65 Night light Install only applique for room, room lobby, wardrobe and terraces PER ROOM (Single Room Area)		345 117 69 0	nr nr nr nr	500 700 900 1500	172,500 81,900 62,100 0
SUB-Total (Page 1)						1,203,600

No	Description	Code	Qty	Unit	Rate	Amount
A	General Outlets Inspect, modify, and test all the raceways and cabling for the following outlets : MATV outlet (Coaxial cable)		34	nr	2000	68,000
B	Main distribution board Supply & Install, connect, test and commission provisional for Normal distribution board (IP BOXes)		23	nr	3000	69,000
	a- DB panel for rooms one floor (both normal and emergency panels)		23	nr	3000	69,000
	b- DB panel for rooms two floor (both normal and emergency panels)		2	nr	8000	16,000
	PROVISIONAL SUM for emergency electric cables to EDB in the ceiling bulkhead including accessories and other necessary requirements - PER METER		0	MT	140	0
C	Fire Alarm System Dismantle, fix and re-install or replace as per engineer instructions the following as per drawings:					
	a- Optical type smoke detector (without programming)		0	nr	2000	0
	b- Evacuation speaker		0	nr	2000	0
D	Telephone/Data outlets Supply & Install, connect, test, commission telephone outlet including cables (UTP CAT 3) and data outlet including cables (UTP CAT 6), conduits, pull and junction boxes and all accessories required to complete the work.					
	Data outlet (Per Outlet)		23	nr	2000	46,000
	Telephone outlet (Per Outlet)		1	nr	2000	2,000
E	Wiring Devices Supply & Install, connect, test, commission telephone fixture consisting of sockets (RJ 11) and data fixture consisting of sockets (RJ 45) and all accessories required to complete the work.					
	Data Fixture (Per Face Plate)		91	nr	400	36,400
	Telephone Fixture (Per Face Plate)		100	nr	400	40,000
SUB-Total (Page 2)						346,400

Handwritten corrections:
1600
36,800
46,000
2,000
1600

Handwritten corrections:
- 9600
336,800

Total (BASIC Electrical works) -- SUPPLY & INSTALL (Pages; 1 & 2)	1,550,000
إجمالي القيمة النهائية للأعمال الأساسية بعد الخصم الخاص فقط واحد مليون وخمسمائة وخمسون ألف جنيه مصري	1,550,000



Handwritten notes:
1540400
مستوى التكلفة

شركة تنفيذ للتشطيبات والمقاولات

المقاول
العالم

المستخلص الختامى والحساب النهائى المجمع لعقد مرحلة ١ - أعمال كهرباء غرف فندقية بفندق هلتون دريم لاند
قيم الأعمال المنفذة وضريبة القيمة المضافة المسددة

التاريخ: ٢٠١٩/٠٤/١١

بيان الإيرادات المحققة عن القيمة المعمدة لأعمال العقد المنفذة خلال العام ٢٠١٨														
م	العقد	قيمة العقد الأساسية	نوع العملية	جهة الاسناد	تاريخ بدء العمل	رقم فاتورة / المستخلص	نوع المستخلص	تاريخ الاعتماد	القيمة السابقة غير شاملة ض ق م	القيمة التراكمية غير شاملة ض ق م	القيمة الحالية غير شاملة ض ق م	ضريبة ض ق م للمستخلص %٥	إقرار ض ق م	ملاحظات
1	أعمال الكهرباء لغرف فندقية هلتون دريم لاند - مرحلة ١	1,540,400	مقاوله باطن (كهرباء)	شركة تنفيذ للتشطيبات والمقاولات	2018 / 6	١	جارى	7 / 2018	0	273,996	273,996	13,700	2018 / 7	سندت الضريبة بإقرار ضريبة قيمة مضافة شهر ٢٠١٨ / ٧ مبلغ ١٥٠٧٠ جم بزيادة ١٣٧٠ جم عن قيمة الضريبة ١٣٧٠٠ جم
٢						جارى	8 / 2018	273,996	565,614	14,581	2018 / 8	سندت الضريبة بإقرار ضريبة قيمة مضافة شهر ٢٠١٨ / ٨ مبلغ ١٣٢١١ جم بعد خصم ١٣٧٠ جم لتسوية قيمة الضريبة ١٤٥٨١ جم		
٣						جارى	12 / 2018	565,614	801,608	11,800	2018 / 12	سندت الضريبة بإقرار ض ق م شهر ٢٠١٨ / ١٢ بمبلغ ١١٨٠٠ جم خاصة بهذا العقد جزء من الضريبة ١٧٨٠٠ المسددة بالإقرار		
١م	إجمالى قيمة جزء الأعمال المنفذة من العقد خلال العام ٢٠١٨							2018	0	801,608	801,608	40,080	841,688	إجمالى القيمة المعمدة لأعمال العقد المنفذة خلال العام ٢٠١٨ فقط شاملة واحد وأربعين ألفا و٦٨٨ جم - شاملة ض ق م

بيان الإيرادات المحققة عن القيمة المعمدة لأعمال العقد المنفذة خلال العام ٢٠١٩														
م	العقد	قيمة العقد الأساسية	نوع العملية	جهة الاسناد	تاريخ بدء العمل	رقم فاتورة / المستخلص	نوع المستخلص	تاريخ الاعتماد	القيمة السابقة غير شاملة ض ق م	القيمة التراكمية غير شاملة ض ق م	القيمة الحالية غير شاملة ض ق م	ضريبة ض ق م للمستخلص %٥	إقرار ض ق م	ملاحظات
4	أعمال الكهرباء لغرف فندقية هلتون دريم لاند - مرحلة ١	1,540,400	مقاوله باطن (كهرباء)	شركة تنفيذ للتشطيبات والمقاولات	2018 / 6	٤	ختامى	4 / 2019	801,608	1,118,750	317,142	15,857	2019 / 4	سندت الضريبة (ض ق م) بإقرار ضريبة قيمة مضافة شهر ٢٠١٩ / ٤ مبلغ ١٥٨٥٧ جم عن مستخلص ٤ الختامى لهذا العقد
٢م						إجمالى قيمة جزء الأعمال المنفذة من العقد خلال العام ٢٠١٩							2019	801,608

إجمالى كلى أعمال العقد المنفذة من بدء العمل فى ٢٠١٨ / ٦ حتى تاريخ التسليم ٢٠١٩ / ٤ / ١١														
م	إجمالى القيم الكلية عن الأعمال المنفذة من العقد من تاريخ بدء العمل حتى تاريخ المستخلص الختامى ٢٠١٩/٠٤/١١ مزامنا لإنهاء التنفيذ والتسليم للأعمال							2018 2019	0	1,118,750	1,118,750	55,937	1,174,687	إجمالى كلى القيمة المعمدة لكافة أعمال العقد المنفذة خلال العامين ٢٠١٨ - ٢٠١٩ عند انتهاء تنفيذ وتسليم الأعمال فقط مليون مائة أربعة وسبعون ألفا و٦٨٧ جم شاملة ض ق م

HASO

شركة هاسو للمقاولات والتنمية
HASO - EGYPT

القاهرة فى : ٢٨ / ١١ / ٢٠١٣ م

شهادة خبرة - سابقة أعمال

إلى من يهمله الأمر

تحية طيبة وبعد ،،،

تشهد شركة هاسو للمقاولات والتنمية HASO-EGYPT أن مجموعة البدرى للتنمية والاستثمار ومن خلال إحدى شركاتها المتخصصة (شركة البدرى للأعمال الكهروميكانيكية BADRY MEP) قد قامت بتنفيذ أعمال الكهرباء الداخلية لعدد ٤٧ عمارة سكنية - مقولة باطن الشركة لحساب المقاول العام شركة النصر العامة للمقاولات (حسن علام) بمشروع تطوير القطاع الشمالى بمحافظة الجيزة - إسكان أرض مطار إمبابة.

وقد بلغت جملة الأعمال المنفذة ٣,٣٩١,٩٣٥ جم فقط ثلاثة ملايين وثلاثمائة وواحد وتسعون ألفا وتسعمائة وخمس وثلاثين جنيها مصريا للأعمال التى تم إستلامها نهائيا فى ٢٠١٣/١١/١٨.

وقد تم تنفيذ الأعمال وتسليمها بصورة جيدة ومرضية.

أعطيت هذه الشهادة بناء على طلب شركة مجموعة البدرى الشركة المنفذة دون مسئولية على شركتنا.

وهذه شهادة منا بذلك ،،،

وتفضلوا بقبول فائق الاحترام ،،،

مدير المشروعات

م/ محمد خليل

المقاول

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

المقاول
فرع:
كود العملية:
اسم محرر العقد:
تاريخ:
محل:

النصر العامة للمقاولات
حسن محمد علام

عقد مقاوله من الباطن

في يوم الإثنين الموافق ٢٠١٨/١٠/٢٠

تم التعاقد بين كل من :-

أولاً : شركة النصر العامة للمقاولات (حسن محمد علام) ويمثلها السيد / ربيع محمد - الإدارة
ثانياً / السيد / ربيع محمد - مقراًها الرئيسى شارع حسن علام أمام أكاديمية الشرطة -

تسم الوائلي - العباسية - القاهرة . ومطلبا اختيار إدارة الشئون القانونية بها .
(الشركة - طرف أول)

ثانياً شركة النصر العامة للمقاولات مقاول أعمال (مبانى / مرافق / طرق)
مقره:
محافظة:
تليفون رقم:
بطاقة ضريبية رقم:
ويتمتع فى هذا العقد السيد / هانى السيد بمسمى مقاول

(المقاول - طرف ثانى)

تمهيد

حيث أن الطرف الأول قد تعاقد مع السيد / هانى السيد (رب العمل)
على تنفيذ مشروع المقاولات العامة للمقاولات (العقد الرئيسى) وان

العمل فى المشروع يتطلب تنفيذ أعمال

مقاولات عامة للمقاولات

وحيث أن الطرف الثانى قد عرض القيام بتنفيذ الأعمال المذكورة وفقاً لما هو متفق عليه بين الطرفين
الأول ورب العمل فى العقد المحرر بينهما بشأن الأعمال سالفة الذكر (العقد الرئيسى) ومرفقاته الفنية
والمالية وبناء على قبيل الطرف الأول للعرض المشار إليه .

فقد أقر الطرفان بأهليتهما للتعاقد ووافقا على اعتبار هذا التمهيد وكذا المقاييس والمواصفات والرسومات
المرفقة جزءاً لا يتجزأ من هذا العقد لئلا يثار من قوة ملزمة
وأتفق على الأمر :-

المسند الأول

الأعمال موضوع العقد



(١) يتعهد الطرف الثانى بالقيام بتنفيذ الأعمال موضوع هذا العقد والوردة فى التمهيد المتقدم وبمسمى
تفصيلاً بالمقاييس المرفقة بالعقد وطبقاً للشروط والمواصفات
للقوامم الفنية وأصول الصناعة وتعليقاً على المواصفات المرفقة
المحددة لتنفيذ الأعمال موضوع هذا العقد
مقره:
محافظة:
تليفون رقم:
بطاقة ضريبية رقم:



أمر إسناد

السادة / شركة هاسو للمقاولات

تحية طيبة وبعد

إيماءاً الى العرض المقدم منكم لمناقصة أعمال ابراج إضاءة لطبيب سمرة انقدم
والى الممارسة التى تمت بتاريخ ٢٠٠٦/٨/٨ بمبلغ ٥٦٤٠٠٠٠٠٠٠ جنية فقط
وقدرة خمسمائة اربعة وسكون الفاً جنيهاً مصرياً لاغير وموافقة مجلس الادارة
بجلسته رقم (٣٥) بتاريخ ٢٠٠٦/٨/١١ بالاشتراطات التالية :-

- مدة العملية ستون يوم من استلام أمر الإسناد
- يتم استكمال التامين الابتدائي إلى نسبة ٥ % من اجمالى الأعمال بعد
الممارسة كتامين نهائى .
- فى حالة طلب دفعة مقدمة يتم تجهيز خطاب ضمان بنكى بتيمة اندفعا
سارى طوال فترة العملية .
- يتم إرسال مندوباً مفروض من الشركة بتوقيع على العقد وإتمام إجراءات
التعاقد .


وتفضلوا بقبول وافر الاحترام ،،،،،

استشارى النادى

د/ هشام محمد حسيب

مستشارى النادى

ثروة حسن حسن

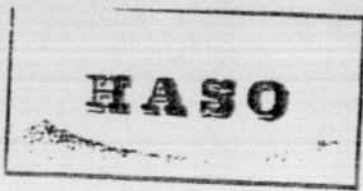

HASO - EGYPT

و للمقاولات والتنمية
شركة البدرى وشركاه

أمر إسناد

هاسو للمقاولات والتنمية HASO EGYPT أسندت مشروع / عملية رفع كفاءة شبكة أعمدة إنارة قرية
مع شركة ألكو الكهربائية إلي مجموعة البدرى BADRY GROUP (شركة البدرى للأعمال الكهروميكانيكية)

لوثائق العطاء المرفقة والرسومات الهندسية وقوائم الكميات المعتمدة بإجمالي قيمة : ثمانية وسبعون ألف جنيه
ي فقط لا غير - ٧٨٠٠٠٠ ج.م

اء التكرم بالبدء فوراً في التنفيذ وعمل الرسومات التنفيذية والاعتماد من الاستشاري وتوريد المواد بالموقع .

ان يتم الصرف طبقاً لطريقة الدفع ذاتها بعقدنا المبرم والمتفق عليه .

ذا أمر إسناد منا بذلك .


وتفضلوا بقبول فائق الاحترام



المدير الإداري

ع/ لؤي البدرى

م/ محمد خليل

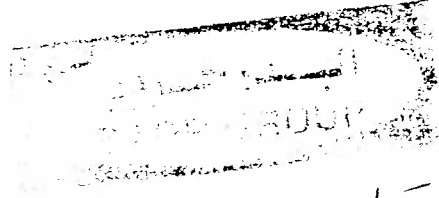

أستدنت لؤي البدرى
لؤي

وثيقة العقد الأساسية

عقد مقاوله (1) أعمال تعديل ورفع كفاءة أعمدة إنارة الشوارع
المرحلة الثالثة - جمعية وقرية الطالع - كم 42 طريق القاهرة الاساعيلية الصحراوى



تعالى ، حرر هذا العقد ،،

أق في مدينة القاهرة في يوم الخميس الموافق 22 / 1 / 2009 م
من :

شركة آكو الكهربائية، ويمثلها السيد محمود على الأعصر مدير عام الشركة بصفته، ومحله المختار هو 17
ش سليمان الحلبي - التوفيقية - محافظة القاهرة، والمشار إليه فيما بعد بالعميل أو صاحب العمل أو (الطرف
الأول)، ويشمل هذا التعبير كل من يخلف صاحب العمل ومن يحيل إليهم العقد.
شركة هاسو للمقاولات والتنمية (م. هانى البدرى وشركاه)، سجل تجارى رقم 5064 العبور، ويمثلها السيد
المهندس هانى البدرى محمد بصفته مدير عام الشركة، ومحله المختار 6 ب شارع 6 أكتوبر من جسر
السويس - منشية السد العالى - السلام - القاهرة، والمشار إليها فيما بعد بالمقاول أو الشركة المنفذة أو
(الطرف الثانى)، ويشمل هذا التعبير من يخلف المقاول ومن يصرح له بإحالة العقد إليه .

تنفيذ

من العميل "الطرف الأول" يرغب في تنفيذ أعمال تعديل ورفع كفاءة أعمدة إنارة الشوارع الداخلية بالمرحله
بجمعية وقرية الطالع - بصفته متعاقدًا مع المالك "جمعية الطالع" على تنفيذ بعض الأعمال ومن ضمنه
المنظورية بعقدنا هذا ، فقد عهد إلى الطرف الثانى، ليقدم عروض لتنفيذ الأعمال المطلوبة، على أن يتم البند
حله الثالثة بقرية الطالع لتنفيذ أعمال تعديل ورفع كفاءة أعمدة إنارة الشوارع الداخلية بها.
فضل العميل العرض المقدم من الطرف الثانى "المقاول" بعد التقييم الفنى والمالى للعرض المقدم، وتلقى عرض
افه مع تلك التى يأملها العميل وحسن سير وتميز سابقة أعمال المقاول المنفذة، والتزام عرضه للقيام بتنفيذ
المنظورية للمواصفات الفنية الموضوعه كعقد التزام بعمل، ولما كان عرض الطرف الثانى (المقاول) قد
من بقبول وموافقة الطرف الأول (العميل)، فقد إتفقا الطرفان بصفتهما وبعد إقرارهما بكامل أهليتهما للتعاقد على
العقد التالية ومع اعتبار هذا التمهيد وما يلحقه من مكاتبات ووثائق ومستندات وإجراءات وممارسات وأعمالنا
ذة جزء لا يتجزأ من العقد ومكملا له.

المادة الأولى : الغرض من العقد

الغرض من هذا العقد كعقد التزام بعمل هو تعديل ورفع كفاءة أعمدة إنارة الشوارع الداخلية بالمرحلة الثالث
معية وقرية الطالع، شاملة المواد والمعدات والعمالة وجميع الأشياء اللازمة للتنفيذ، وحسب وثائق العقد المكمل
للاحقة، وطبقا لمقاييسه البنود الأساسية المطلوبة أسفله بعرض المقاول، على أن يوفر العميل المياه والكهرب
جهازية الموقع والحذر والرمد وتمديد الكابلات أول بأول، وفى حالة الاتفاق على مهام جديدة يتم إضافتها كتأجيل
تأثير العقد بموجب خطاب إستكمال أو إسناد أعمال مفصل الكميات والبنود والشروط والقيمة، أو يتم استقلالها ب
ديد حسب اتفاق الطرفين.

المادة الثانية : مدة العقد

مدة تنفيذ هذا العقد هي شهر ميلادي، وتشمل مدة التنفيذ للأعمال المطلوبة المتعاقد عليها طبقا لمقاييسه وعرضه
بالمرحلة الثالثة، وتبدأ مدة التنفيذ من تاريخ صرف الدفعة المقدمة ، وتستثنى أيام الأجازات والأعياد والتوقفات
انصالحه لظروف الموقع.

PICO

Petroleum Services & Investment Co.
 24 Wadi El Nile St., Maadi
 Cairo - Egypt
 Tel. : +2 02 7688100 - 7688200
 Fax : +2 02 7688130

Purchase Order		(Contractor)	
TO	: HASO - Egypt	FROM	: Mahmoud Azzam
ATTN.	: Eng. Hany El Badry	DATE	: Jan. 12, 2007
FAX NO.	: 02 - 295860	Ref.	: Order No. S-HM-120707

SUBJECT: Order No. S-HM-120707

Dear Sir,

By this fax we place our order no.S-HM-120707 by a total value of Euro.

Item	Qty.	Description	Unit Price EGP	Total Price EGP
1	3	Manufacture , Supply and Install Conical High Mast (Lighting Application) 30 M Height , withstand 140 km/hr wind velocity (Wind Pressure) Fabricated from Steel ST.37 , with Finishing Hot Dip Galvanized , c/w Frame & Ladder with cage protection and Plat Form According to : HASO Catalog No. HM-20-X22-HASO and HASO Professional Drawing : DWG. No. E-104 / HASO Frame carrying 5 Flood Light 1000 w , HPS EURO Model , Italy , c/w Control Gear Order Value include Transport , Assembly and Site Installation at : Soakers Plant field , Red Sea	54000 EGP	162000 EGP
Total Net Price in EGP : One Hundred Sixty Two Thousands Egyptian Pounds				162000 EGP



Terms and Conditions:


- Payment: 50% Down Payment + 50% Against Receiving Material & Job End
- Required Documentation:
 - Commercial invoice
 - Detailed packing list
- Delivery: 5 weeks from PO date.

Please proceed with the order; your acknowledgment within 3 days is highly appreciated.

Best regards

M. Azzam
 Eng. Mahmoud Azzam



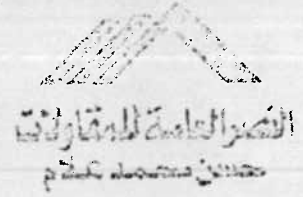


امر اسناد

السيد المقاول / شركة هاسو للمقاولات والتشييد - ٦ ب ش ٦ اكتوبر من جسر السويس
سجل تجارى رقم ٥٠٦٤
نرجو الاحاطة بانه تمت الموافقة علي اسناد :
اعمال تعديل وصيانة وتركيب اعمدة اناارة هاى ماست
بعملية : الطريق الشرياني (رصيف ٧١)

م	بيان الاعمال	وحدة	الكمية	الفئه	الاجمالي
١	حامل كشافات دائرى عدد (٢) قطعة حديد مجلفن	عدد	١	٥٠٠٠	٥٠٠٠
٢	محدد عز ممتور محرك جهاز الرفع والانزال	عدد	١	٣٠٠٠	٣٠٠٠
٣	مصاعق مطر للحمايه من الصواعق	عدد	١	١٠٠٠	١٠٠٠
٤	توريد وتركيب عليه مكونه كشاف ١٠٠٠ اوات	عدد	١٢	١٠٠	١٢٠٠
٥	توريد جاويط ١٥٠٠ x بالورد والصواميل	عدد	٢٤	١٥٠	٣٦٠٠
٦	توريد فلنشة تمبلد اسود سمك ٤ مم	عدد	٢	٤٠٠	٨٠٠
٧	صيانة جهاز الرفع وانزال باستاندات الحامل	مقطوعيه	١	٦٥٠	٦٥٠
٨	تعديل صندوق التوصيل الكهربى	مقطوعيه	١	٢٠٠	٢٠٠
٩	توريد وتركيب كابل تغذيه ٣٥ متر باش	مقطوعيه	٢	١٢٠٠	٢٤٠٠
١٠	صيانة اطقم السوست والباب والحوامل السفليه	مقطوعيه	١	٢٤٤,٤٤	٢٤٤,٤٤
١١	توريد وتركيب وير استانكس ٦ مم ٣٥ متر	مقطوعيه	٥	٦٠٠	٣٠٠٠
١٢	توريد وتركيب لوحة تشغيل كهربيه للصارى	عدد	١	٧٥٠	٧٥٠
١٣	تجميع ورفع وتثبيت وتركيب مشتملات الصارى علي القاعده الخرسانيه (غير شامله الونش)	مقطوعيه	١	٢٥٠٠	٢٥٠٠
قيمة الصارى الواحد					٢٤٤٤٤,٤٤
القيمة الاجماليه للاعمال = عدد ٩ صارى (عامود اناارة) x ٢٤٤٤٤,٤٤ ج =					٢٢٠٠٠٠٠٠

عد المفوض العام
فرع المباني والاستثمار العقارى
طريقي نصرت جيب

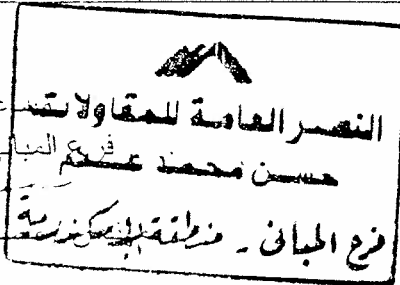

شركة هاسو للمقاولات والتشييد
م. هاسو المين
١٣

نوع العقد
كود العنونة
اسم محور العقد
.....

النصر العامة للمقاولات
حسن محمد حسن

عقد مقاوله من الجاهن

في يوم الموافق ١ / ١ / ٢٠٠٨ م

تسم التعاقد بين كل من : -
أولاً : شركة النصر العامة للمقاولات (حسن محمد علام) ويمثلها السيد / المفوض العام لإدارة
ومقرها الرئيسي شارع حسن علام أمام أكاديمية الشرطة -


قسم الوابلي - العباسية - القاهرة بمطبخها المختار إدارة الشؤون القانونية ببا .
(الشركة - طرف أول)

ثانياً : شركة هاسو للمقاولات والتشييد مقاول أعمال (مبانى / مرافق / طرق)
مقره 777 الكورس 10 من المنطقة الدمشق
محافظة القنيطرة بطاقة شخصية / عائلية رقم / 1000000000 / 1000000000
محافظة تليفون رقم سجل تجارى رقم
بطاقة ضريبية رقم 908-994-994 عضو الإتحاد المصرى لمقاولى التشييد والبناء رقم ٧٨٤٢
ويمثله فى هذا العقد السيد / هشام البدر
(المقاول - طرف ثانى)

تمهيد

حيث أن الطرف الأول قد تعاقد مع (رب العمل)
على تنفيذ مشروع الطريق السريع - سيناء الكبري (العقد الرئيسى) وأن
العمل فى المشروع يتطلب تنفيذ أعمال أعمدة إنارة هامم

وحيث أن الطرف الثانى قد عرض القيام بتنفيذ الأعمال المذكورة وفقاً لما هو متفق عليه بين الطرفين
الأول ورب العمل فى العقد المحرر بينهما بشأن الأعمال سالفة الذكر (العقد الرئيسى) ومرفقاته الفنية
والمالية وبناء على قبول الطرف الأول للعرض المشار إليه .
فقد أقر الطرفان بأهليتهما للتعاقد ووافقا على إعتبار هذا التمهيد وكذا المقايسة والمواصفات والرسومات
المرفقة جزءاً لا يتجزأ من هذا العقد لها ماله من قوة ملزمة .
وأتفقا على الآتى : -



البند الأول الأعمال موضوع العقد

(١) يتعهد الطرف الثانى بالقيام بتنفيذ الأعمال موضوع هذا العقد والواردة فى التمهيد المتقدم والمبينة
تفصيلاً بالمقايسة المرفقة بالعقد وطبقاً للشروط والمواصفات والرسومات المرفقة بالعقد الرئيسى ووثقاً
لقواعد الفنية وأصول الصناعة وتعليمات مهندس الطرف الأول وفى المواعيد الموضحة بالجداول الزمنية
المحددة لتنفيذ الأعمال موضوع هذا العقد .

حسان السيد

أمر إسناد

بتاريخ: ١٣/٤/٢٠١٦ م
السادة / مجموعة البدري للتنمية والاستثمار


م	البيان	الوحدة	الكمية	سعر الوحدة	الإجمالي
١	عمل جسمه ارضية لقياسات واختبار نوع التربة بأماكن الاعددة الاربعة المحددة - ووضع تصميم للقاعدة الخرسانية للعمود لتثبيت التربة حول قاعدة العمود الخرسانية سابقة التجهيز	مقطوعة	٤	١٥٠٠	٦٠٠٠
٢	حفر حلزوني اسطواني لمكان تثبيت العمود بقطر لا يتجاوز ١ متر مع النزح السطحي للمياه الجوفية ان وجدت وصرفها على اقرب نقطة صرف للملعب	مقطوعة	٤	٣٧٥٠	١٥٠٠٠
٣	تثبيت وانزال قاعدة العمود الخرسانية سابقة التجهيز مع توريد وصب وتنفيذ الخرسانة العادية العاجلة كيميائيا وسريعة الشك حول القاعدة وتركيب الوصلات المرنة لدخول الكابلات	مقطوعة	٤	١٠٠٠٠	٤٠٠٠٠
٤	توريد وتركيب بنر ارضي مقاومه ٣ اوم بجوار قاعدة كل عمود شامله القضيب النحاسي وغرفة التفطيش الخرسانية	مقطوعة	٤	٢٩٠٠	١١٦٠٠
٥	توريد وتركيب كابلات الاعددة بدءا من اللوحة العمومية - كابل نحاس مسلح قطاع ١٦x٤م+١٠م ارضي داخل مواسير PVC قطر ٤ بوصة في المسار	متر طولي	٤٠٠	٢٤٠	٩٦٠٠٠
٦	تجميع وصلتي عمود صاري اضاءة الملعب بالشحط الميكانيكي حتى نهاية الدليل مع تركيب وايرات السحب الصلب- وتركيب العوارض الافقية العلوية الخاصة بتثبيت الكشافات	مقطوعة	٤	٤٠٠٠	١٦٠٠٠
٧	تركيب كابلات الكشافات الموردة مع النظام بدءا من فتحة لوحة العمود داخل وصلات الصاري حتى التوصيل بالكشاف	متر طولي	٨٠	٢٥	٢٠٠٠
٨	تركيب لوحة عمود/ صاري اضاءة الملعب وتوصيل كابلات كشافات العمود اليها مع تمديد وتوصيل كابل الكنترول	مقطوعة	٤	١٢٥٠	٥٠٠٠
٩	تركيب كشاف اضاءة ملعب قدرة ١٥٠٠ وات ميتال هاليد/٣ فاز- ٣٨٠ فولت- ٥٠ هرتز والربط بدليل التوجيه بالعمود	بالعدد	٢٤	١٠٠	٢٤٠٠
١٠	تركيب وتثبيت واتزان عمود / صاري اضاءة ملعب المجمع شامل الكبس خارج وصلة العمود الخرسانية سابقة التجهيز - والبند يشمل ونش الرفع والتركيب بيومه ٤٠ متر والقفص المعدني للإتارة	مقطوعة	٤	١٠٥٠٠	٤٢٠٠٠
١١	توجيه كشاف اضاءة الملعب Aiming باستخدام اقلام الليزر	مقطوعة	١	٣٠٠٠	٣٠٠٠
١٢	توريد وتركيب عدد ٤ قاطع ثلاثي MCB فرعى ٥٠ امبير للأعمدة من اللوحة العمومية الموجودة حاليا خارج ملعب الهوكي	مقطوعة	١	٦٠٠٠	٦٠٠٠
	الإجمالي (قط مانتان وخمسة واربعون ألف جنيها لا غير)				٢٤٥٠٠٠

السادة / مجموعة البدري للتنمية والاستثمار
العنوان: ٦ شارع ١٦ أكتوبر منشية السد العالي - السلام - القاهرة .
بعد التحية ،،،

بناءً على العرض المقدم منكم بتاريخ / / ٢٠١٦ م

نرجو التكرم بتنفيذ الأعمال الموضحة عاليه بالكميات قرين كل منها إلى نادي اتحادا لشرطة الرياضي مع موافقاتنا بالمستخلصات الدالة على ذلك حتى يمكن استخراج شيك إجمالي المبلغ المطلوب ومع بيان عما إذا كانت هذه الأصناف مسخرة جبرياً من عدمه . ومع التزامكم بكافة الشروط الواردة خلفه .
و تفضلوا بقبول وافر الاحترام،،،

لواء / محمد علي شوقي
رئيس مجلس ادارة نادي اتحاد
الشرطة الرياضي

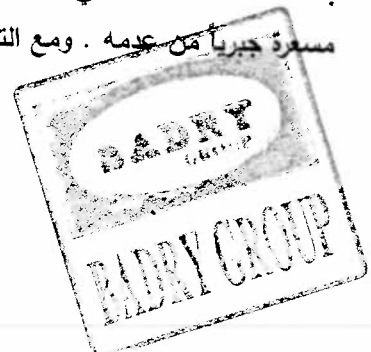



HASO - EGYPT

للمقاولات والتنمية
البيدرى وشركاه

أمر أسناد

هاسو للمقاولات والتنمية HASO EGYPT أسندت مشروع / عملية أعمال ابراج إضاءة للمعب كرة
بناي الغابة الرياضي إلى مجموعة البدرى BADRY GROUP (شركة البدرى للأعمال الكهروميكانيكية)

لوثائق العطاء المرفقة والرسومات الهندسية وقوائم الكميات المعتمدة بإجمالي قيمة خمسمائة وخمسة آلاف وستمائة
مصري فقط لا غير ، ٥٠٠٠٠٠٠٠٠ جم

التكريم بالبدء فوراً في التنفيذ وعمل الرسومات التنفيذية والاعتماد من الاستشاري وتوريد المواد بالموقع .



ان يتم الصرف طبقاً لطريقة الدفع ذاتها بعقدنا المبرم والمتفق عليه .

هذا أمر إسناد منا بذلك .

وتفضلوا بقبول فائق الاحترام

المدير الإداري
ع/ نور الدين
م/ محمد خليل



استلمت الأمر
ع/ نور الدين
م/ محمد خليل

شهادة

كلفنا بالإشراف وشهدنا نحن مكتب المهندس الاستشارى (م. هشام حسيب) كاستشارى لنادى الغابة الرياضى (القاهرة - مصر الجديدة) ، بقيام المقاول شركة هاسو للمقاولات والتنمية (م. هانى البدرى وشركاه) ، بالتنفيذ والتسليم الابتدائى ، والنهائى لعملية إنارة ملعب كرة القدم الرئيسى بالنادى ، طبقا للعقد الموقع ولأمر الإسناد المعتمد من مجلس إدارة النادى الموقر، وبقيمة إجمالية قدرها ٦٤٠٠٠٠٠ جم ، فقط ستمائة وأربعون ألف جنيه مصري لا غير .

وقد قامت الشركة بتصنيع وتوريد وتركيب وتسليم أبراج إنارة الملعب بارتفاع ١٨ متر ، حمولة البرج عدد ٣٠ كشاف ملاعب ، كاملة بمجارى الكابلات وسلم الحماية وشرقة الصيانة والقواعد الخرسانية المسلحة والعزل مما جميعه طبقا للكود المصرى للأعمال الحديدية والمدنية وكود الزلازل .

كما قامت الشركة ببناء وتنفيذ لوحات التوزيع الكهربائية العمومية والفرعية للأبراج، وتنفيذ شبكة الكابلات ونظام الأرضى ، ونظام إضاءة الطوارئ للملعب ١٠٠٠ وات صوديوم ، وتقنية الإضاءة الرئيسية للملعب ٢٠٠٠ وات ميتال هاليد ، مما جميعه طبقا للكود المصرى للأعمال والكهربائية ، وطبقا للدراسات الضوئية المتخصصة (إضاءة مباريات المحترفين) ، وبمراعاة توصيات ال FIFA .

وقد أتمت الشركة تنفيذ وتسليم جميع الأعمال المطلوبة بمقاييس المشروع وكراسة الشروط والمواصفات ، حسب الخطة الزمنية وطبقا لأصول الصناعة والمواصفات الفنية ، وتميزت الشركة طوال تنفيذها للأعمال بالجدية والالتزام والتعاون وإتباعها لمعايير الجودة والأمان .

وقد أعطيت هذه الشهادة بناء على طلب الشركة المنفذة ، ودون أى مسئولية علينا .

وهذه شهادة منا بذلك ،،،


المهندس الاستشارى

م. هشام حسيب

Architect
Hassib
C. 3/349

سجل رقم : ٣ / ٣٤٩

٢٠٠٧ / ٢٠٠٨




شهادة سابقة أعمال

تشهد إدارة نادى الغابة الرياضى بمصر الجديدة بأن شركة هاسو للمقاولات والتنمية قامت بتنفيذ أعمال أبراج إنارة ملعب كرة القدم الرئيسى بالنادى طبقاً للشروط العامة والمواصفات الفنية بقيمة إجمالية قدرها ٦٤٠٠٠٠٠,٠٠ جنية " فقط وقدره ستمائة وأربعون ألف جنيهاً لا غير "

حررت هذه الشهادة بناءً على طلب الشركة دون أدنى مسئولية على النادى

تحريراً فى ٢٠/١٠/٢٠١٤

هاسو
يعتمد
إدارة النادى



PO for Goods and Services/2394

Dispatch via Print

UNHCR
17 Makka El Mokarama St.
3rd Proximity , 7th District, 6 October City
Cairo 844
Egypt

Supplier: 0000235190
BADRY GROUP for Development & Investment
Manshiat Al-Sad Al-Aaly, Al-Salam, Cairo
Cairo
Egypt

Contact:
E-Mail: badry@badrygroup.com
Phone:
Fax:

Purchase Order EGY01-0000002394	Date 22/12/2020	Page 1
Payment Terms Net Zero - Immediate Pay	Incoterms 2010 DELIVERED AT PLACE	Ship Via NO SHIPMEN
Buyer HANNA, MARIHAME	Phone	Currency EGP
Fax	E-mail HANNAM@unhcr.org	

Consignee:
UNHCR RO Egypt
17 Makka El Mokarama St.
3rd Proximity , 7th District, 6 October City
Cairo 844
Egypt

Bill To:
UNHCR
17 Makka El Mokarama St.
3rd Proximity , 7th District, 6 October City
Cairo 844
Egypt

We refer to your offer reference " RFQ032 18 classroom for MOE" and hereby place the following order subject to the terms within this document.

Line-Sch	Item and Description	Country of Origin	Quantity	UOM	Unit Price	Total Amount	Due Date
1- 1	00007495 MAINTENANCE, REPAIR, PREMISES	Egypt	1.00	EA	1,357,360.0000	1,357,360.00	31/01/2021

Schedule Total 1,357,360.00

Item Total 1,357,360.00

The Purchase Order is placed for the renovation and security enhancement of 18 public school classrooms in coordination with MoH and in accordance with the requirement and specifications advertised under RFQ 32/2020, the contractor's technical and financial offers and approval by the LCC 5/2020.

UNHCR project focal points are:

Mohamed El Shafei <shawkym@unhcr.org> 0129-009-9243
Yara BENGHARSA <benghars@unhcr.org> 0106-283-9394

Supply Unit focal point is:


Marihame Hanna <hannam@unhcr.org>

Total PO Amount 1,357,360.00



Please refer to the attached Terms & Conditions.
Please sign and return the acknowledgment page, which is the last page of this purchase order. All dates are in DD/MM/YYYY format.

Authorized Signature



**PO for Goods and Services/2394
Acknowledgement**

Dispatch via Print

BADRY GROUP for Development & Investment
Manshiat Al-Sad Al-Aaly, Al-Salam, Cairo
Cairo
Egypt

Purchase Order	Date	Page
EGY01-0000002394	22/12/2020	13
Payment Terms	Incoterms 2010	Ship Via
Net Zero - Immediate Pay	DELIVERED AT PLACE	NO SHIPMEN
Buyer	Phone	Currency
HANNA, MARIHAME		EGP
Fax	E-mail	
	HANNAM@unhcr.org	

To: HANNA, MARIHAME
17 Makka El Mokarama St.
3rd Proximity , 7th District, 6 October City
Cairo 844
Egypt

Please confirm your acceptance of this purchase order by sending this acknowledgement, signed and stamped, by mail to the above indicated buyer, within 7 days.

Please ensure that all correspondence cites our purchase order number PO: **EGY01 - 0000002394**

Receipt by UNHCR of the signed purchase order acknowledgement copy, vendors written confirmation order, or initiation of performance under this purchase order by the vendor shall constitute acceptance of the purchase order by the vendor, including all terms and conditions herein contained or otherwise incorporated by reference.

Acceptance is limited to the terms herein stated and/or incorporated by reference and any additional or different terms or conditions proposed by the seller are rejected unless expressly approved in writing by an authorised representative of UNHCR.

The invoice will be paid on the following banking information:

Bank Name: NBE Bank (National Bank of Egypt)
Bank Branch: East Cairo Branch
Bank ID Qualifier:
Bank ID:
Bank Account Number: 1553070361820600018

Please verify the above banking information and inform us in writing of any changes.

Name _____ Signature _____ Stamp _____ Date (DD/MM/YYYY) _____



UNHCR - PO EGY01 - 000002394 - INS Project
Refurbishment and Security Enhancement of 18 Public School Classrooms
WORK INSPECTION REQUEST AND APPROVAL

شركة البدرى لأعمال التطوير والإحلال والتجديد
 إحدى الشركات المسجلة لدى وزارة الإسكان
BADRY Remodeling & Renovations Co.

Contractor: BADRY GROUP / BADRY REMODELING CO Request No: WIR - 001 -- Final Inspection & HANDOVER
 Contract Prime: PO EGY01 - 000002394 Date: 14/01/2021
 Agreement No.: Project Code / Project No: RFQ/32/2020 - 15292-2020 Measured Works: Basic Contract Works - PO 2394, 1-Classroom

TO: UNHCR RO Egypt
 The following items are ready for your inspection on (Date): 14/01/2021 at (time): 14:00
 LOCATION: Classroom # 01 @ Ground Floor SHTC # 01/09/2394 **WIR NO.: CR-01/18**
 Work Order REF: 7th District School, Activity ID: Final Inspection & HANDOVER

Description Refurbishment and Security Enhancement - Renovation Works - Measured Works

SN	Item Description	QTY	Unit of measure
1	Site preparation	1	LS
2	Iron bars for doors - chemabox coated and painted in the required color with final coat (PUR 131) in the required color	72.71	Kg
3	Iron bars for windows - anti-rust primer chemabox coated and painted in the required color with final coat (PUR 131) in the required color	249.24	Kg
4	Iron bars for windows - anti-rust primer chemabox 161 coated and painted in the required color with final coat (PUR 131) in the required color	71.44	Kg
5	Painting - fresh coat of paint for classroom, a minimum of two layers of putty in perpendicular directions followed by 3 coats of fresh paint with required colors	153.06	Sq.M
6	Lighting - LED (ceiling mounted profile W60L120 all mounting brackets, accessories, fittings, installation and operation. Light life span should be minimum 3Y	6	No
7	Wall fans - Procure and install wall mounted fans of 16 inches with 3 speeds, from an ISO qualified manufacturer and must be approved by UNHCR	3	No
8	Secure cupboards - Two door metal security cupboards, with lock pad of dimension: height 100-120cm; width: 90cm and depth of 45cm. the Cupboards should be from an ISO qualified manufacturer, approved by UNHCR	0	No
9-1	Heavy duty electric sockets 1 - Power circuit outlet (3X4mm ²), CU wires, PVC conduit 25 mm the item include final termination point Legrand (power sockets) switch 25A outlet ,220V	1	Pack
9-2	Heavy duty electric sockets 2 - Power circuit outlet (3X3mm ²), CU wires, PVC conduit 25 mm the item include final termination point Legrand (power sockets) switch 25A outlet ,220V	1	Pack
SUM	Refurbishment Works Summary		

Attachment : Above Table Of Handovered Executed Basic Works (Acc. To BID BOQ)

We certify that the above items have been coordinated with the following Contractors and other relevant packages

BID NO : UNHCR RFQ 32 / 2020 Pro. INS Project / Classroom Activity RENOVATION RMDL TASK Final Inspection & HANDOVER

All requests must be submitted at least 24 hours prior to the required inspection and approval.

Site Engineer (Contractor) Eng. Mohamed El-Badry BADRY REMODELING QA/QC Engineer (Contractor) Eng. Ahmed Mansour BADRY REMODELING


Received Date 14/01/2021 Time 14:00:00 Client's / Consult's Sign _____

Consultant's Approval / Comments: Code A - Approved Code B - Approved with comments Code C - Rejected & Resubmit

- Final delivery of refurbishment basic works executed in classroom within 100% implementation for all items - except cupboard supply item.
- Cupboard supply will be carried out with implementation of milestone 2, given your observations and additions requested from the factory to the sample provided
- T&C and closing all snags were finished for all basic and additional works in the classroom - 100% execution rate
- Delivery & handover to client after site evacuation took place, and the customer's custody with a 100% to all basic & additional works finished in the classroom

Client's / Consult's Sign [Signature] Date _____

Contractor's Received Date 24 Jan, 2021 Contractor's Rep. [Signature]



شهادة

تشهد شركة بيكو الطاقة للخدمات البترولية **PICO ENERGY For Petroleum Services** ، بأن المقاول شركة هاسو للمقاولات والتنمية (م. هاني البدرى وشركاه) ، الشركة المنفذة لعملية مشروع إنشاءات موقع الخدمات البترولية للشركة بشقير - البحر الأحمر ، وبقيمة إجمالية قدرها 300000 جم ، فقط ثلاثمائة ألف جنيه مصري لا غير .

وقد قامت الشركة بتنفيذ وتوريد وتركيب معالجة وترميمات وصيانة وحماية للمنشأ الخرساني للمبنى 07 Parcel ، مع تنفيذ أعمال العزل ضد الرطوبة ، وأعمال التشطيبات المدنية والمعمارية المطلوبة مما جميعه طبقا للكود المصري للأعمال المدنية وكود الزلازل .

كما نفذت الشركة للمبنى 07 أعمال الكهرباء والإضاءة ، وكذلك أعمال تصميم وتصنيع وتوريد وتركيب مجارى الهواء المعدنية للتكييف المركزي والتهوية (الداكت) ، وأعمال شبكات المواسير للمياه المتلجة والتسخين وإطفاء الحريق ، مما جميعه طبقا للكود المصري للأعمال والكهربائية والميكانيكية والتكييف والإطفاء ، ومواصفات سماكنا SMACNA .


وقد أتمت الشركة تنفيذ جميع الأعمال المطلوبة طبقا لمقاييس الأعمال وحسب الخطة الزمنية ودونما تأخير ، وطبقا لأصول الصناعة والمواصفات الفنية ، وتميزت الشركة طوال تنفيذها للأعمال بالجدية والالتزام والتعاون وإتباعها لمعايير الجودة والأمان .

وقد أعطيت هذه الشهادة بناء على طلب الشركة المنفذة ، ودون أي مسئولية علينا .

وهذه شهادة منا بذلك ،،،

يعتمد ،،، مدير المشروعات

م / محمود عزام



تحريرا فى : 2005/7/6

HASO

شركة هاسو للمقاولات والتنمية
HASO - EGYPT

شهادة سابقة أعمال

المشروع: أعمال الصيانة العلاجية والإحلال والتجديد ورفع كفاءة
المبنى الإدارى بموقع الخدمات البترولية بشقير - البحر الأحمر

إلى من يهمه الأمر ،

نشهد نحن نحن شركة هاسو للمقاولات والتنمية HASO-EGYPT ،

بتنفيذ شركة / البدرى لأعمال التطوير BADRY REMODELING / إحدى شركات مجموعة البدرى للتنمية والاستثمار

لأعمال الصيانة العلاجية والإحلال والتجديد ورفع كفاءة

المبنى الإدارى بموقع الخدمات البترولية بشقير - البحر الأحمر

مقولة عام شركة بيكو الطاقة للخدمات البترولية

وشملت أعمال الإصلاحات والترميمات الخرسانية والعزل والتعديلات المعمارية والكهرباء والإضاءة والأنظمة والتكييف المركزى

وقد جرى تنفيذ الأعمال وفق المواصفات الفنية والجدول الزمنى وتم تسليمها بصورة مرضية دونما تأخير

وهذه شهادة منا بذلك

وتفضلوا بقبول فائق الاحترام ،،،

مدير المشروعات

م/ محمد خليل

شركة هاسو للمقاولات والتنمية
HASO

To : HASO – EGYPT
Haso Contracting & Development Co
Fax # : 02 2995860
Attn. Eng. Hany El-Badry

From : PICO ENERGY
Petroleum Service
Dept. : C/W Procurement
Ref. : 110/12/S3/05

Priority : Routine Urgent
Cairo , 4 May , 2005

No. of Pages : 1
(Including this one)

Executing Order No. 16/S3

الطرف الأول : المالك - Owner

شركة بيكو الطاقة للخدمات البترولية PICO ENERGY For Petroleum Services
مشروع إنشاءات موقع الخدمات بشقير - البحر الأحمر - Pico Services Building Site Shokair Basement

الطرف الثاني : المقاول العام - Main Contractor

شركة هاسو للمقاولات والتنمية HASO – EGYPT (م . هاني البدرى وشركاه)
6 شارع أكتوبر من جسر السويس - السلام - القاهرة ، ت : 2958530 ويمثلها المهندس / هاني البدرى محمد

الإشتراطات والمواصفات : SPECS & CONDS

طبقا لعرض أسعاركم المعتمد ومعاينكم لموقع تنفيذ الأعمال ، والتنفيذ طبقا للمواصفات القياسية المصرية ، والالتزام بتعليمات الأمن الصناعي ACC. TO your Quotaion No. 01244 & Site Survey , National Code , Safty & Quality Instructions

الأعمال المطلوبة : Working Items Sheet

طبقا للتفاصيل والكميات والبنود المحددة بقائمة البنود بكراسة الشروط ACC. TO our B.O.Q (Bill Of Quantities)

Total Value (LE)	Over All Items Summery – Executing Works	SHEET	FLOOR	PART	BUILD	PARCEL	SE
120000	Reapaire & Maintenance R.C Structure	1/6	1+2	C	SSE	07	1
25000	Insulation & Protection R.C Structure	2/6	1+2	D	SSE	07	2
50000	Arctuectural Finishing (Indoor + Facade)	3/6	2	A	SSE	07	3
35000	Electrical & Lighting (Indoor + Landscape)	4/6	0+1	B	HUSS	07	4
40000	Duct Works Central Air Condition & Ventulation (HVAC)	5/6	2	B	HUSS	07	5
30000	Pipe Works Chilled Water , Heating , Fire Fighting (F.F)	6/6	2	B	HUSS	07	6
300000	Total Contract Price = Overall Order Value						

HASO

شركة هاسو للمقاولات والتنمية
HASO - EGYPT

شهادة سابقة أعمال

المشروع: أعمال التطوير والإحلال والتجديد ورفع كفاءة مبنى الغلايات بفندق
نوفوتيل مطار القاهرة - ملك الشركة العربية للاستثمار السياحي (آشتى)

إلى من يهمه الأمر،

نشهد نحن نحن شركة هاسو للمقاولات والتنمية HASO-EGYPT ،

بتنفيذ شركة / البدري لأعمال التطوير BADRY REMODELING / إحدى شركات مجموعة البدري للتنمية والاستثمار

لأعمال التطوير والإحلال والتجديد ورفع كفاءة

مبنى الغلايات بفندق نوفوتيل المطار - مطار القاهرة الدولي

ملك الشركة العربية للإستثمار السياحي والفندقي (آشتى)

وشملت أعمال الإنشاءات المدنية الجديدة والعزل والتعديلات والتحسينات المعمارية والكهرباء والإضاءة والأنظمة والتكييف

وقد جرى تنفيذ الأعمال وفق المواصفات الفنية والجدول الزمني وتم تسليمها بصورة مرضية دونما تأخير

وهذه شهادة منا بذلك

وتفضلوا بقبول فائق الاحترام،،،

مدير المشروعات



م/ محمد خليل





الشركة العربية للاستثمار السياحي و الفندقى
The Arab Co. for Hotels & Tourism Investment

عقد مقاوله
انشاء مبنى الغلايات
بفندق نوفوتيل المطار

أنة فى يوم الثلاثاء الموافق ٢٥ / ٨ / ٢٠٠٩
تم التعاقد بين كل من :-

أولاً:- الشركة العربية للاستثمار السياحي و الفندقى - ويمثلها فى هذا العقد:
السيد الأستاذ/ محمد محمد شفيق بصفته رئيس مجلس الإدارة والعضو المنتدب
" ومقرها برج (٤) عمارات المروة (٢) شارع أحمد تيسير - كلية البنات
مصر الجديدة - القاهرة " .

(طرف أول)

ثانياً:- شركة هاسو للمقاولات والتنمية " هانى البدرى وشركاه " - ويمثلها
فى هذا العقد: السيد المهندس / هانى البدرى ومقرها ٦ب شارع أكتوبر منشية
السيد العالى - السلام - القاهرة .

(طرف ثانى)




شركة هاسو للمقاولات والتنمية
HASO



مكتب التصميمات المعمارية
المهندس الإستشارى / وفاق حنا ناروز

ARCHITECTURAL DESIGN BUREAU
CONSULTANT ARCHITECT: WAFIK H. NAROUIZ

شهادة

يشهد مكتب التصميمات المعمارية / المهندس الاستشارى وفاق حنا ناروز
بأن شركة هاسو للمقاولات والتنمية قد اسند اليها مشروع تنفيذ الاعمال المدنية لمبنى الغلايات الجديدة بفندق
نوفوتيل بمطار القاهرة طبقا للمناقصة والممارسة التى تمت بمقر شركة اشتى المالكة للفندق ، وان شركة
هاسو قد قامت بتنفيذ الاعمال والتى تقدر قيمتها بحوالى ٤٩٠٠٠٠٠ جنيه (اربعمائة وتسعون الف جنيه) وانه
تم انتهاء الاعمال بصورة جيدة طبقا للمواصفات الفنية المعدة من قبلنا وأنها أبدت تعاون تام مع جهاز
الإشراف وادارة الفندق ..

وهذه شهادة منا بذلك .

المهندس الاستشارى

وفاق حنا ناروز

مكتب التصميمات المعمارية
مهندس / وفاق حنا ناروز
١٤٠ شارع النزهة - مصر الجديدة



140 EL - Nozha Street , Heliopolis - Cairo
Tel. : 26374882 Fax. : 26349553

١٤٠ شارع النزهة - مصر الجديدة - القاهرة
ت : ٢٦٣٧٤٨٨٢ فاكس : ٢٦٣٤٩٥٥٣

E-MAIL: adb_narouz@yahoo.com



BADRY Group Company

Construction • Contracting • Service • Turnkey • Design & Build

Project Experience



Project: NPP Cement Bags Factory Construction

Description: LE 5.0 millions, awarded directly to BADRY MEP “BADRY GROUP Member”, MEP works, Infrastructure for two-story building complex, production hall & three storage halls 12000 sq.mt steel structure, three administrative concrete buildings over a 3,000 sq.mt. substation 11 KV, transformer, busway, M.D.B, generator, distribution boards, power cables, industrial installations, hi-bay industrial lighting, street & landscape lighting, cable trays, cable routing, indoor electric facilities, low current systems, site works, ventilation, metallic works and mechanical yard and site utilities.

Completed: Jan. 2011

Location: Sixth October Industrial Area, Polaris – Turkish Developer

Owner / Developer:

NPP, National Paper Products Corp.
6th October, Piece 7
Polaris Industrial Area
Mr. Ayman Abu Ella
012.318.4758

Architect / MEP Consultant:

CONCORD Consulting Gp.
Dr Tamer Fouad
KEM Consultant
5th District, New Cairo
Eng. Mohamed Haleem
022.617.0518



Project: Cairo Airport Novotel Hotel, Boilers Building

Description: LE 0.6 million, awarded to HASO-EGYPT “BADRY GROUP Member”, complete Construction & MEP works, Infrastructure for two-story building complex, heavy boilers hall & one administrative floor 500 sq.mt concrete building substation, M.D.B, distribution boards, power cables, lighting, facade lighting, cable trays, cable routing, indoor electric facilities, low current systems, site works, air condition, ventilation, metallic works and mechanical yard, plumbing, complete architectural finishes and site utilities.

Completed: Feb. 2010

Location: Cairo Airport Hotels Area
Novotel Hotel

Owner / Developer:

Arab Co. for Hotels,
Tourism Inc. – ACHTI
Novotel Hotel
Cairo Airport
Mr. Mahmoud A. Moez
022.291.4794

Architect / MEP Consultant:

A.D.B
Eng. Wafik Naroz
Magdy Rafla Consult.
83 Hegaz St., Heliopolis
Eng. Mahmoud Zaghloul
022.635.1734



Project: Meliha Natural Gas 3 Compressors Upgrade

Description: LE 0.4 millions, awarded to HASO-EGYPT "BADRY GROUP Member", MEP works, Installations for 3 huge Gas Compressors at Meliha Gas Production Plant, Agiba Petroleum Co. executing steel works, sunshields, metal "stainless steel 316" piping works for three compressors, control panel, distribution boards, power & control, communication and fiber cables, industrial installations, cable trays, cable routing, outdoor electric facilities, site works, metallic works and mechanical yard and site utilities.

Completed: Jun. 2010

Location: Meliha, Al-Alamein
Petroleum Road –
Matrouh

Owner / Developer:

Agiba Petroleum Co.
Pico Petroleum Services
7, Road 150th, Maadi
Mr. Mahmoud Azzam
022.359.1990

Architect / MEP Consultant:

Pico Control Systems
Engineering Dept.
Wadi El-Nile St, Maadi
Mr. Mohamed Ezat
022.768.8100



Project: Ghaba Sporting Club Main Football Court Lighting

Description: LE 0.7 million, awarded to HASO-EGYPT "BADRY GROUP Member", complete Construction & Electrical works, 4 steel structure lighting towers 25 meters height, 10 ton steel, foundation, sports lighting acc. To FIFA, competition level 500 lux, substation, M.D.B, lighting control & distribution boards, power cables, emergency lighting super high pressure sodium 600Ws, facade lighting, cable trays, cable routing, outdoor electric facilities, site works, metallic works and mechanical yard, complete architectural finishes and site utilities.

Completed: Feb. 2008

Location: Ghaba Sporting Club
Heliopolis, Cairo

Owner / Developer:

Ghaba Sporting Club,
Heliopolis, Cairo
Club Manager
H.L 19234

Architect / MEP Consultant:

E.H.H
Eng. Hesham Hasib
Heliopolis, Cairo
012.215.6964





BADRY Group Company

Construction • Contracting • Service • Turnkey • Design & Built

Project: Alexandria International Seaport Upgrade

Description: LE 0.3 millions, awarded to HASO-EGYPT “BADRY GROUP Member”, Terminals 10 High Mast Outdoor Lighting works, Assembly & Installations for 10 High Masts 35 Meter Heights at Alexandria sea port, fabrication & executing steel metal works for lighting rings, cantilevers, lighting control panels, distribution boards, power cables, lighting fixtures installations, cable trays, cable routing, outdoor electric facilities, site works, metallic works and mechanical yard and site utilities.

Completed: Jun. 2009

Location: Alexandria, Seaport
Alex. Gov.

Owner / Developer:

Alex Seaport Auth.
El-Nasr General Contracting
“Hassan Allam”
1, Hassan Allam St.,
Abbasia, Cairo
Projects Manager
022.685.8063

Architect / MEP Consultant:

North Med. Sea Org.
Alex Seaport Auth.
Alex. Gov.
Engineering Dept.
Elec. Eng. Dept Manager
034.800.3590



Project: Al-Hussein Universal Hospital Fire Fighting

Description: LE 0.1 million, awarded to HASO-EGYPT “BADRY GROUP Member”, for five-story 3 buildings complex complete conventional Fire Fighting works execution, installations, steel structure for fiber glass tanks, foundation, Fire pumps, control panel, power cables, cable trays, cable routing, steel seamless piping networks, risers, sprinklers, Fire Cabinets, Fire Network facilities, site works, metallic works, plumbing and mechanical yard, complete architectural finishes and site utilities.

Completed: Dec. 2007


Location: Hussein Hospital
Al-Azhar, Cairo

Owner / Developer:

Al-Azhar University
Al-Hussein Hospital Al-Azhar, Cairo
Hospital Manager
022.512.5035

Architect / MEP Consultant:

Al-Azhar University
Faculty of Engineering
Nasr City, Cairo
022.261.7176

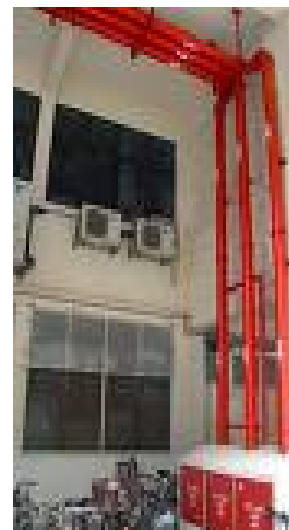

Project: American University AUC New Campus

Description: LE 0.1 millions, awarded to HASO-EGYPT “BADRY GROUP Member”, Parcels 7, 13, 14 Air Duct, Insulation Installations works for HVAC equipments at New Cairo, AUC University, executing steel metal sheets air ducts “60 Tons” acc. To smacna c/w facilities, site works, metallic works and mechanical yard and site utilities.

Completed: Aug. 2007

Location: New Cairo, 5th District.
Cairo Gov.

Owner / Developer:

AUC American Univ.
Samsung & Samcreat “J.V”
Khrafi National “Watania”
Mohandsieen, Giza
Contracts Manager
023.336.7688

Architect / MEP Consultant:

Shaker Consultancy Group
Ring Road, Maadi
Cairo. Gov.
Mech. HVAC Dept.
Mech. Dept Manager
022.520.4505



Project: Al-Talaea Agricultural Association Street Lighting

Description: LE 0.15 million, awarded to HASO-EGYPT “BADRY GROUP Member”, for Phase D, 20 Streets, 150 Double Poles, 12 Meters, 400w HPS, Street lighting works execution, installations, foundation, Earthing, lighting panels, power cables, cable routing, site works and mechanical yard, complete architectural finishes and site utilities.

Completed: Mar. 2008

Location: Al-Talaea Association
Misr Ismaeila Road
10th Ramadan, Cairo

Owner / Developer:

Al-Talaea Association
Misr Ismaeila Road
10th Ramadan, Cairo
Association Manager
015.400.0040

Architect / MEP Consultant:

Alco Electrical Co.
Downtown Cairo
Mr. Mahmoud Al-Aaser
Eng. Adel Ragheb
010.110.2000



Project: Egyptian Contracting Co. Main Administrative Building

Description: LE 7.0 millions, awarded to HASO-EGYPT "BADRY GROUP Member", Electrical works, Infrastructure for fifteen-story building complex, Mokhtar Ibraheim Main H.Q Administrative Building 25,000 sq.mt concrete structure, substation 11 KV, 2 transformer, busway system "GE-USA", M.D.B, generator, distribution boards, power cables, Earthing & lightning, cable trays, cable routing, indoor electric facilities, fire alarm, low current systems, site works, metallic works and mechanical yard and site utilities.

Completed: Current, Running Works

Location: 26 July St., Sphinx Sq.
Mohandsieen, Cairo

Owner / Developer:

Egyptian Contracting Co.
Mokhtar Ibraheim
26 July St., Sphinx Sq.
Mohandsieen, Giza
Eng. Mostafa Magdy
023.347.1507

Architect / MEP Consultant:

Center of Studies & Training
in MEP "CST"
Faculty of Engineering
Cairo University
P.Dr. Mahmoud Abd Hakim
P.Dr. Esam Abu Dahab
023.569.8269



Project: Embaba Airport Land New Residential Area "North Giza"

Description: LE 5.0 millions, awarded to HASO-EGYPT "BADRY GROUP Member", Electrical works, for # 50 Buildings; five-story building complex, concrete structure, M.D.B, distribution boards, power cables, Earthing, risers, cable trays, cable routing, electrical power / lighting / low current outlets, wiring devices, indoor electric facilities, site works, metallic works, mechanical yard and architectural finishes and site utilities.

Completed: Current, Running Works

Location: Embaba Airport Land
Ring Road, Bashtel
Giza, Egypt

Owner / Developer:

Ministry of Housing
Central Agency for Construction
Agency Head
023.536.6033

Architect / MEP Consultant:

Hassan Allam Co. "G.C"
Crown Home Consult.
53 Beirut St, Heliopolis
Project Manager "Consult"
022.690.1632



Project: El-Rabwa Building, Obour City

Description: LE 3.0 millions, owner is HASO-EGYPT "BADRY GROUP Member", Construction works including MEP works, Infrastructure for five-story building complex, plus basement, green landscape surrounding area 3,000 sq.mt concrete structure, M.D.B, emergency generator, elevator distribution boards, power cables, Earthing & lightning, cable trays, cable routing, indoor MEP facilities, fire alarm, low current systems, site works, metallic works and mechanical yard and site utilities.

Completed: Current, Running Works

Location: Obour City, 2nd district
Cairo, Egypt

Owner / Developer:

BADRY GROUP
HASO-EGYPT Co.
P.O.Box 1527 Alf Maskan
Cairo 11777, Egypt
Mr. Yasser Badry
022.295.5487

Architect / MEP Consultant:

BADRY MEP
P.O.Box 1527 Alf Maskan
Cairo 11777, Egypt
Mr. Hany Badry
022.295.8530



Project: El-Aruba Building, Shourok City

Description: LE 3.5 millions, owner is BADRY MEP "BADRY GROUP Member", Construction works including MEP works, Infrastructure for five-story building complex, plus basement, green landscape surrounding area 3,500 sq.mt concrete structure, M.D.B, emergency generator, elevator distribution boards, power cables, Earthing & lightning, cable trays, cable routing, indoor MEP facilities, fire alarm, low current systems, site works, metallic works and mechanical yard and site utilities.

Completed: Current, Running Works

Location: Shourok City, 2nd district
Cairo, Egypt

Owner / Developer:

BADRY GROUP
BADRY MEP
P.O.Box 1527 Alf Maskan Cairo
11777, Egypt
Mr. Hany Badry
022.295.8530

Architect / MEP Consultant:

BADRY MEP
P.O.Box 1527 Alf Maskan Cairo
11777, Egypt
Mr. Hany Badry
022.295.8530



Project: Cleopatra Hotel Construction

Description: LE 1.0 million, awarded directly to BADRY MEP “BADRY GROUP Member”, MEP works, Infrastructure for three-story building complex, five stars hotel license concrete buildings over a 20,000 sq.mt. execution, install only for substation 11 KV, transformer, busway, M.D.B, generator, distribution boards, power cables, indoor lighting, façade lighting, industrial installations, street & landscape lighting, cable trays, cable routing, indoor electric facilities, low current systems, fire alarm, site works, ventilation, HVAC, Fire Fighting, metallic works and mechanical yard and site utilities.

Completed: Under Construction

Location: Cleopatra Beach,
Mersa Matrouh Gov.

Owner / Developer:

Sales Taxes Org.
Nasr City, Cairo
El-Shafey General
Contracting Co.
Mr. Mohamed Hussein
010.344.1090

Architect / MEP Consultant:

Inter Consult
Dr Aly Raafat
Energy Group Consult.
H. El-Koba, Cairo
Eng. Hany Fawzy
022.601.5207



Project: City Stars Intercontinental Hotel Dimming System

Description: LE 1.0 million, awarded to HASO-EGYPT “BADRY GROUP Member”, The Dimming of lighting control system in Intercontinental hotel “City Stars, Golden Pyramids Plaza” for 20 halls, with Lutron systems technology “made in USA”.

Completed: Co-ordination

Location: City Stars, Cairo
Intercontinental Hotel

Owner / Developer:

Golden Pyramids Plaza
City Stars
Capital 2 Building
Nasr City, Cairo
PMO – Moharam
Bakhoom
Mr. Shyamal Chatterjee
022.480.1001

Architect / MEP Consultant:

Shaker Consultancy Group
Ring Road, Maadi
Cairo. Gov.
Elec. Lighting Dept.
E. Dept Manager
022.520.4505





BADRY ELEC

Electrical Works Dept.

6B, Sixth October St., Manshiet Al Sad Al Aaly,
Al-Salam, Cairo, Egypt.

P.O Box 1527 Alf Maskan, Cairo, Egypt.

Tel: +202 219 06 401

Fax: +202 219 06 823 - Cell: +20 100 57 43 852

E-mail: ELEC @badrygroup.com

Web : www.badrygroup.com/ELEC

BADRY
Group